11-5820-334-34P

TM 11-5820-334-34P

TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS (INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECAL TOOLS) FOR

RECEIVER, RADIO R-392/URR (NSN 5820-00-503-1250)

HEADQUARTERS, DEPARTMENT OF THE ARMY

JULY 1977

D101.11:

READEX FICHE best copy available

TECHNICAL MANUAL
No. 11-5820-334-34P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, *28 July 1977*

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS (INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS) FOR RECEIVER, RADIO R-392/URR (NSN 5820-00-503-1250)

Current as of 11 March 1977

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 (Test) located in the back of the manual. Simply tear out the self-addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 (Test) in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Electronics Command, ATTN: DRSEL-MA-Q, Fort Monmouth, NJ 07703.

In either case a reply will be furnished direct to you.

Table of Contents

			Page	Illus Figure
SECTION	I.	Introduction	1	
	II.	Repair parts list	5	
GROUP	00	Receiver, Radio R-392/URR	5	1
	01	Panel and frame	7	2—5
		0101 Amplifier, radio frequency	15	6—11
		0102 Gear assembly, radio frequency, gear train assembly (No parts authorized)		
		0103 Oscillator, radio frequency, crystal controlled	31	12—16
		0104 Amplifier, intermediate frequency	41	17,18
		0105 Amplifier, audio frequency	47	19—21
		0106 Calibrator, crystal	59	22,23
		0107 Oscillator, radio frequency, variable frequency	63	24
	02	Case assembly	65	25
	03	Mounting MT-836/URR (No parts authorized)		
SECTION	III.	Special tools list (Not applicable)		
	IV.	National stock number and part number index	66	

* This manual supersedes TM 11-5820-334-34P, 23 March 1972.

SECTION I
INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of direct support and general support maintenance of the R-392/URR. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code	*Definition*
PA	—Item procured and stocked for anticipated or known usage.
XD	—A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(*a*) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code	*Application/Explanation*
O	—Support item is removed, replaced, used at the organizational level.
F	—Support item is removed, replaced, used at the direct support level.
H	—Support item is removed, replaced, used at the general support level.
D	—Support items that are removed, replaced, used at depot, mobile depot, specialized repair activity only.

(*b*) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	*Application/Explanation*
H	—The lowest maintenance level capable of complete repair of the support item is the general support level.
D	—The lowest maintenance level capable of complete repair of the support item is the depot level.
Z	—Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability codes	*Definition*
Z	—Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
H	—Reparable item. When uneconomically reparable, condemn and dispose at the general support level.
D	—Reparable item. When beyond lower level repair cability, return to depot. Condemnation and disposal not authorized below depot level.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable, (e.g., shims, spacers, etc).

4. Special Information

The following publications pertain to the R-392/URR and its components:

TM 11-5820-334-10, Radio Receiver R-392/URR
TM 11-5820-334-20, Radio Receiver R-392/URR
TM 11-5820-334-20P, Radio Receiver R-392/URR
TM 11-5820-334-35, Radio Receiver R-392/URR

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphameric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4.)

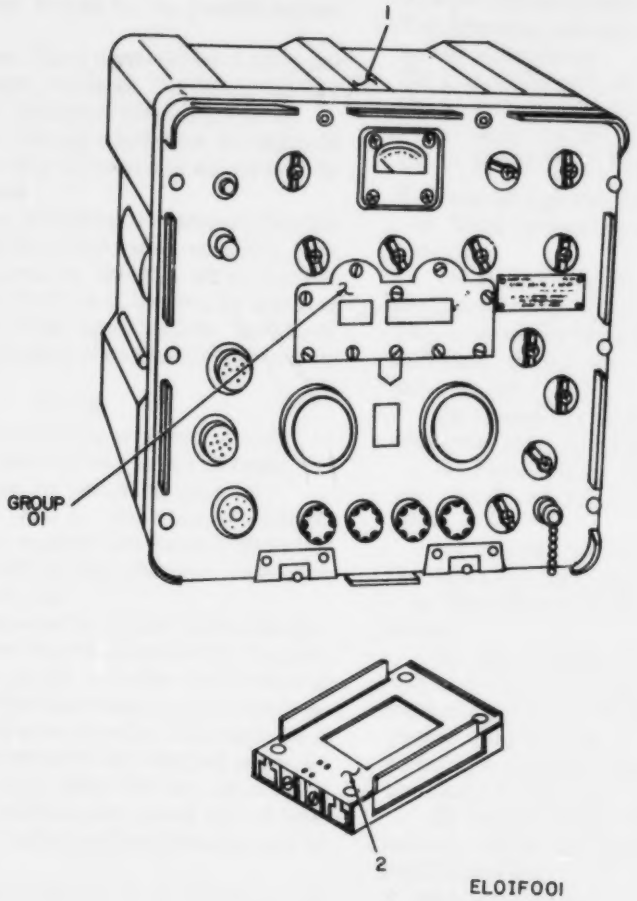

Figure 1. Receiver, Radio R-392/URR.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 00 RECEIVER,RADIO R-392/URR		
1	1	PAHDD	5820-00-503-1649	SMD357515	80063	CASE ASSEMBLY	EA	1
1	2	PAODD	5820-00-396-3195	MT836URR	80058	MOUNTING MT836URR	EA	1

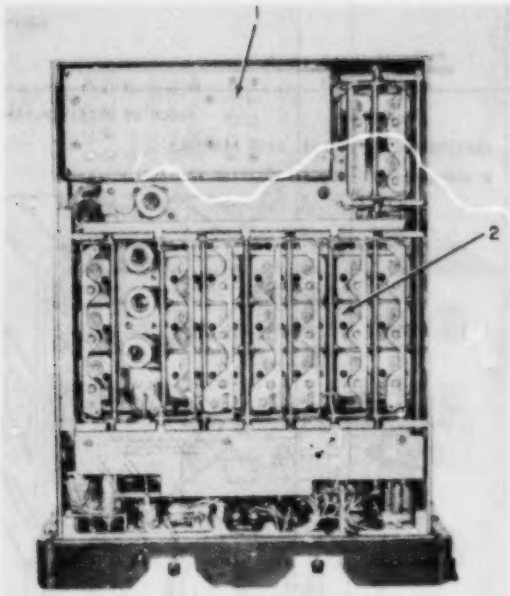

TOP VIEW

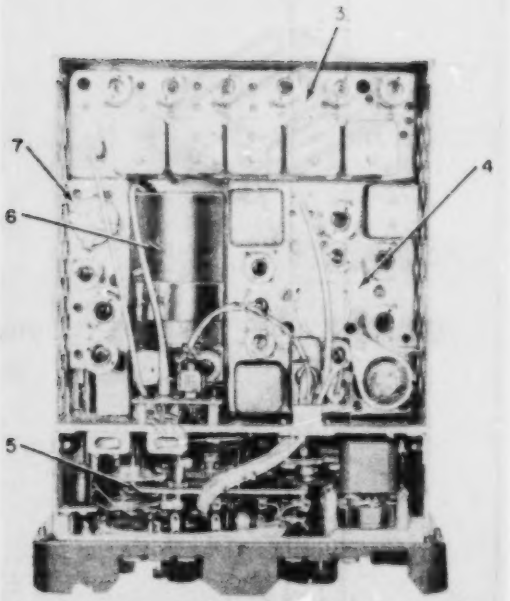

PANEL AND FRAME
BOTTOM VIEW

ELOIF002

Figure 2. Panel and Frame.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 01 PANEL AND FRAME		
2	1	PAFDD	5820-00-503-2533	SMC144716	80063	OSCILLATOR,RADIO FREQUENCY,CRYSTAL CONTROLLED	EA	1
2	2	PAFDD	5820-00-092-1018	SMD144678	80063	AMPLIFIER,RADIO FREQUENCY	EA	1
2	3	PAFDD	5820-00-545-7202	SMD144532	80063	AMPLIFIER,INTERMEDIATE FREQUENCY	EA	1
2	4	PAFDD	5820-00-503-0921	SMD144561	80063	AMPLIFIER,AUDIO FREQUENCY	EA	1
2	5	XDHDD		SMB178858	80063	GEAR ASSEMBLY,RADIO FREQUENCY GEAR TRAIN ASSEMBLY	EA	1
2	6	PAFDD	5820-00-503-1138	SMD144511	80063	OSCILLATOR,RADIO FREQUENCY,VARIABLE FREQUENCY	EA	1
2	7	PAFDD	5820-00-322-4672	SMC144594	80063	CALIBRATOR,CRYSTAL	EA	1

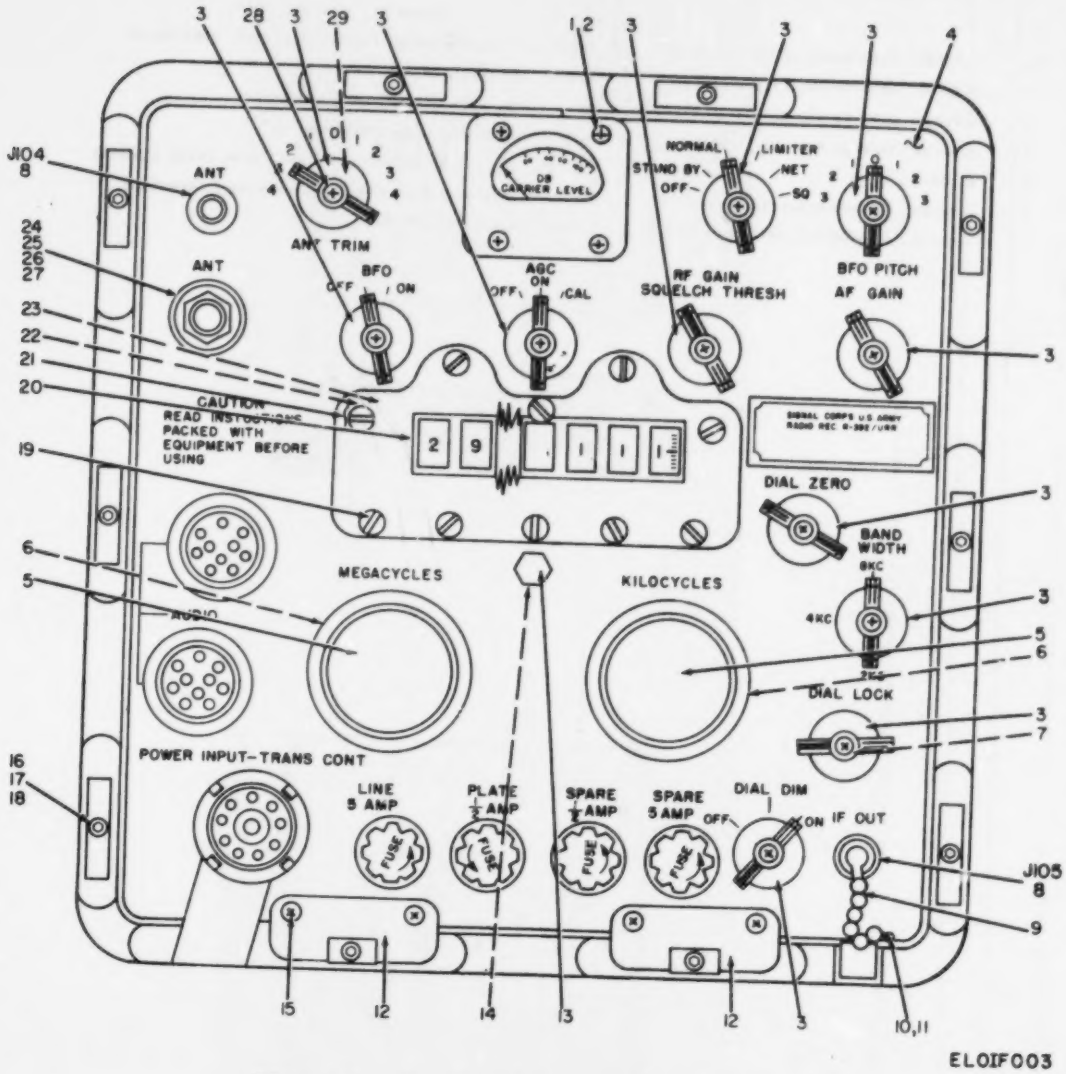

Figure 3. Panel and Frame, Front View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
3	1	XDFZZ		MS35338-21	96906	WASHER	EA	4
3	2	XDFZZ		MS35216-17	96906	SCREW,MACHINE	EA	4
3	3	XDDZZ		SCB16552	80063	KNOB	EA	11
3	4	XDFZZ		SMD144657	80063	PANEL ASSEMBLY	EA	1
3	5	PADZZ	5355-00-667-9002	SMB144517	80063	KNOB	EA	2
3	6	XDFZZ		SMB248829-3	80063	WASHER,FLAT	EA	2
3	7	XDFZZ		SMD144610-18	80063	NUT,PLAIN,HEXAGON	EA	11
3	8	XDFZZ		SMD144610-6	80063	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	2
3	9	XDFZZ		SMD144610-2	80063	CAP AND CHAIN	EA	1
3	10	XDFZZ		MS35216-22	96906	SCREW,MACHINE	EA	5
3	11	XDFZZ		MS35338-22	96906	WASHER	EA	27
3	12	XDFZZ		SMB144332	80063	PLATE,MOUNTING	EA	2
3	13	XDFZZ		SMB144632	80063	PLUG	EA	1
3	14	PAFZZ	5330-00-260-9311	AN622785	88044	PACKING,PREFORMED	EA	4
3	15	XDFZZ		MS35216-24	96906	SCREW,MACHINE	EA	5
3	16	XDFZZ		SMB143282	80063	WASHER,LOCK	EA	10
3	17	XDFZZ		SMB144635	80063	SCREW,CAPTIVE,SOCKET HEAD	EA	10
3	18	XDFZZ		SMD144610-14	80063	WASHER,LOCK	EA	10
3	19	XDFZZ		SMB144634	80063	SCREW,MACHINE	EA	10
3	20	XDFZZ		SMB144628	80063	WINDOW,OBSERVATION	EA	1
3	21	XDFZZ		SMB144631	80063	ESCUTCHEON PLATE	EA	1
3	22	XDFZZ		SMD144627	80063	ESCUTCHEON PLATE	EA	1
3	23	XDFZZ		SMB144629	80063	GASKET	EA	1
3	24	XDFZZ		SMD144610-16	80063	SCREW,SELF-LOCKING	EA	11
3	25	XDFZZ		SMD144610-12	80063	WASHER,LOCK	EA	6
3	26	XDFZZ		SMD144610-19	80063	NUT,PLAIN,HEXAGON	EA	6
3	27	PAFZZ	5940-00-283-5386	SCC16495	80063	POST,BINDING	EA	1
3	28	XDFZZ		SMB144329	80063	WASHER,FLAT	EA	11
3	29	XDFZZ		SMB283173-1	80063	RING,RETAINING	EA	2

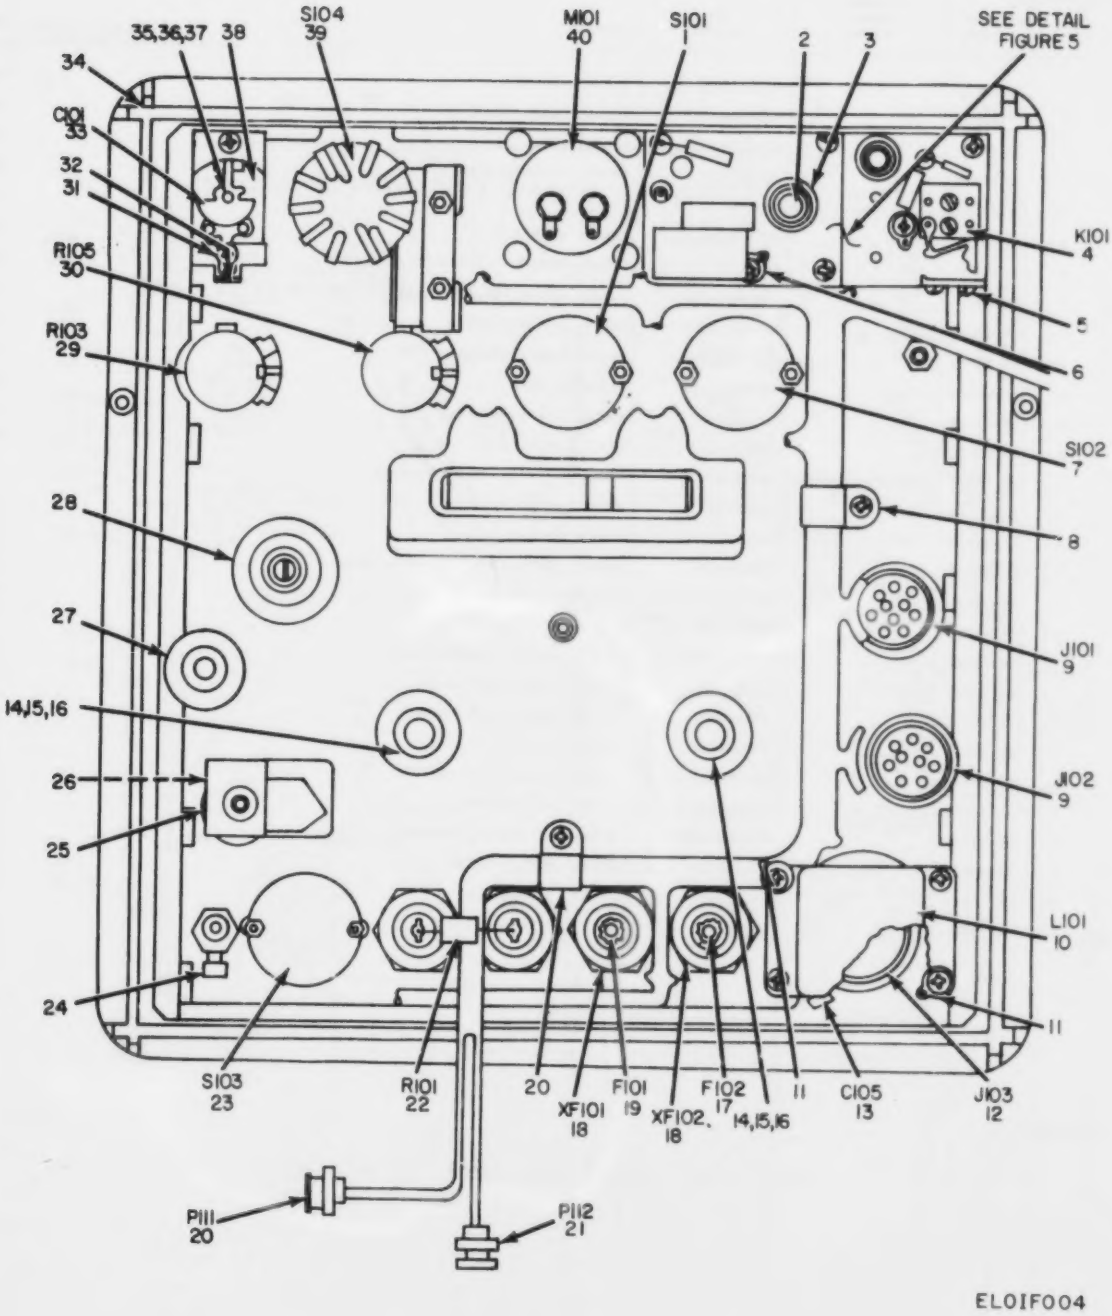

Figure 4. Panel and Frame, Rear View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
4	1	PAFZZ	5930-00-755-5416	SMA146616	80063	SWITCH,ROTARY	EA	1
4	2	XDFZZ		SMB144639	80063	SHAFT ASSEMBLY	EA	1
4	3	XDFZZ		SMB144672	80063	BUSHING,ELECTRICAL CONDUIT	EA	1
4	4	PAFZZ	5945-00-259-6446	SMC143770	80063	RELAY,ARMATURE	EA	1
4	5	XDFZZ		MS35216-10	96906	SCREW,MACHINE	EA	4
4	6	XDFZZ		SMB249257	80063	TERMINAL,SOLDER	EA	1
4	7	PAFZZ	5930-00-546-6287	SMA144618	80063	SWITCH,ROTARY	EA	1
4	8	XDFZZ		SMD144610-23	80063	CLAMP,NYLOCLIP,HP-6N	EA	1
4	9	PAFZZ	5935-00-549-2644	U79U	80058	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	2
4	10	PAFZZ	5950-00-295-7823	SMC144637	80063	REACTOR	EA	1
4	11	XDFZZ		SMD144610-10	80063	TERMINAL,LUG	EA	2
4	12	PAFZZ	5935-00-258-8570	QRE18SL	81312	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
4	13	PAFZZ	5910-00-257-0662	96P4730152	56289	CAPACITOR,FIXED,PAPER	EA	1
4	14	XDFZZ		SMB144359	80063	BUSHING,ELECTRICAL CONDUIT	EA	2
4	15	XDFZZ		SMD144610-11	80063	GASKET	EA	2
4	16	XDFZZ		SMD144610-20	80063	NUT,PLAIN,HEXAGON	EA	2
4	17	PADZZ	5920-00-284-6787	F04A500A	81349	FUSE,CARTRIDGE	EA	1
4	18	PAFZZ	5920-00-553-4420	342006	75915	FUSEHOLDER	EA	2
4	19	PADZZ	5920-00-280-8344	F02GR500A	81349	FUSE,CARTRIDGE	EA	1
4	20	XDFZZ		SMD144610-22	80063	CLAMP,NYLOCLIP,HP-7N	EA	1
4	21	PAFZZ	5935-00-259-0820	31-119	02660	CONNECTOR,PLUG,ELECTRICAL	EA	2
4	22	PAFZZ	5905-00-809-3275	RW306800	81349	RESISTOR,FIXED,WIRE WOUND	EA	1
4	23	PAFZZ	5930-00-644-2929	SMA144617	80063	SWITCH ASSEMBLY	EA	1
4	24	XDFZZ		SMB144625	80063	TERMINAL,LUG	EA	1
4	25	PAFZZ	5340-00-209-7692	SMC144642	80063	LOCK ASSEMBLY	EA	1
4	26	XDFZZ		SMB144361-2	80063	GASKET	EA	3
4	27	XDFZZ		SMB144362	80063	BUSHING,ELECTRICAL CONDUIT	EA	3
4	28	XDFZZ		SMB144666	80063	CONTROL	EA	1
4	29	PAFZZ	5905-00-806-3622	SMB144622-2	80063	RESISTOR,VARIABLE	EA	1
4	30	PAFZZ	5905-00-806-3623	SMB144622-1	80063	RESISTOR,VARIABLE	EA	1
4	31	XDFZZ		MS35335-16	96906	WASHER	EA	3
4	32	XDFZZ		SMD144610-7	80063	TERMINAL,LUG	EA	1
4	33	PAFZZ	5910-00-646-7829	SMB144638	80063	CAPACITOR,VARIABLE,AIR	EA	1
4	34	PAFZZ	5330-00-545-7491	SMB144626	80063	GASKET	EA	1
4	35	XDFZZ		SMD144610-13	80063	WASHER,LOCK	EA	1
4	36	XDFZZ		MS35216-23	96906	SCREW,MACHINE	EA	32
4	37	XDFZZ		SMD144610-17	80063	NUT,PLAIN,HEXAGON	EA	1
4	38	XDFZZ		SMB144630	80063	PLATE,MOUNTING	EA	1
4	39	PAFZZ	5930-00-301-4573	259-0590-00	13499	SWITCH ASSEMBLY	EA	1
4	40	PAFZZ	6625-00-538-9700	ASP222	80130	AMMETER	EA	1

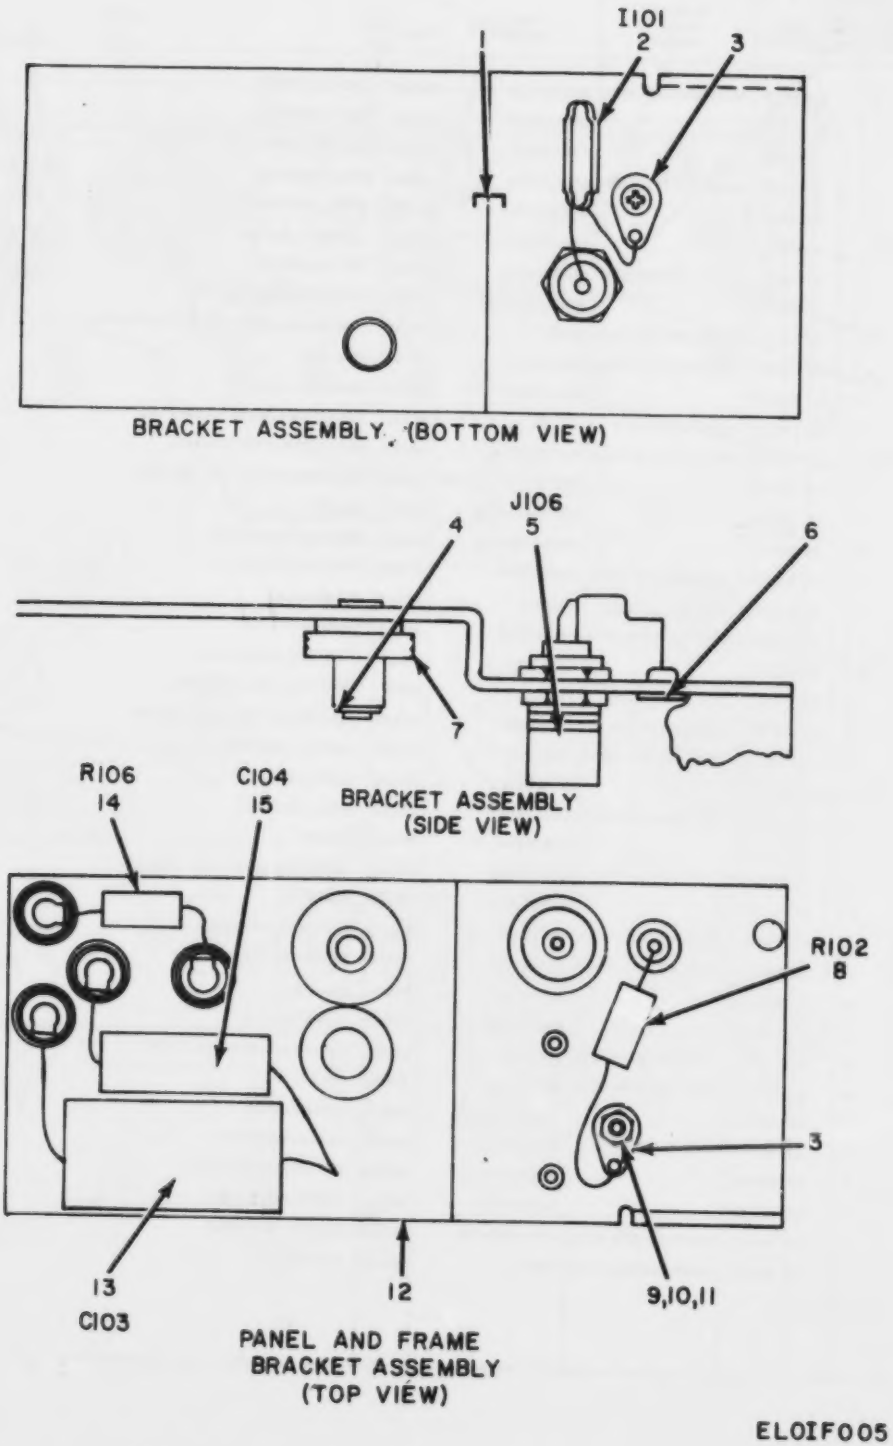

Figure 5. Panel and Frame, Bracket Assembly.

(1) ILLUSTRATION (a) FIG. NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
5	1	XDFZZ		SMD144659	80063	BRACKET ASSEMBLY	EA	1
5	2	PAOZZ	6240-00-179-1811	VG-11	96906	LAMP,GLOW	EA	1
5	3	XDFZZ		SMB249250	80063	TERMINAL,LUG	EA	2
5	4	PAFZZ	5365-00-697-1728	SMB283174-1	80063	RING,RETAINING	EA	4
5	5	PAFZZ	5935-00-244-5728	SMD144659-7	80063	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
5	6	XDFZZ		SMD144659-4	80063	TERMINAL,FEEDTHRU	EA	1
5	7	PAFZZ	3020-00-810-9463	SMB144660	80063	GEAR,SPUR	EA	1
5	8	PAFZZ	5905-00-114-5393	RCR20G224JS	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	9	XDFZZ		MS35337-2	96906	WASHER,LOCK	EA	7
5	10	XDFZZ		MS35649-44	96906	NUT,PLAIN,HEXAGON	EA	1
5	11	XDFZZ		MS35216-13	96906	SCREW,MACHINE	EA	1
5	12	XDFZZ		SMC144661	80063	BRACKET	EA	1
5	13	PAFZZ	5910-00-643-9141	SMD144659-6	80063	CAPACITOR,FIXED,PAPER	EA	1
5	14	PAFZZ	5905-00-195-6502	RC20GF332K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	15	PAFZZ	5910-00-257-0662	96P473015S2	56289	CAPACITOR,FIXED,PAPER	EA	1

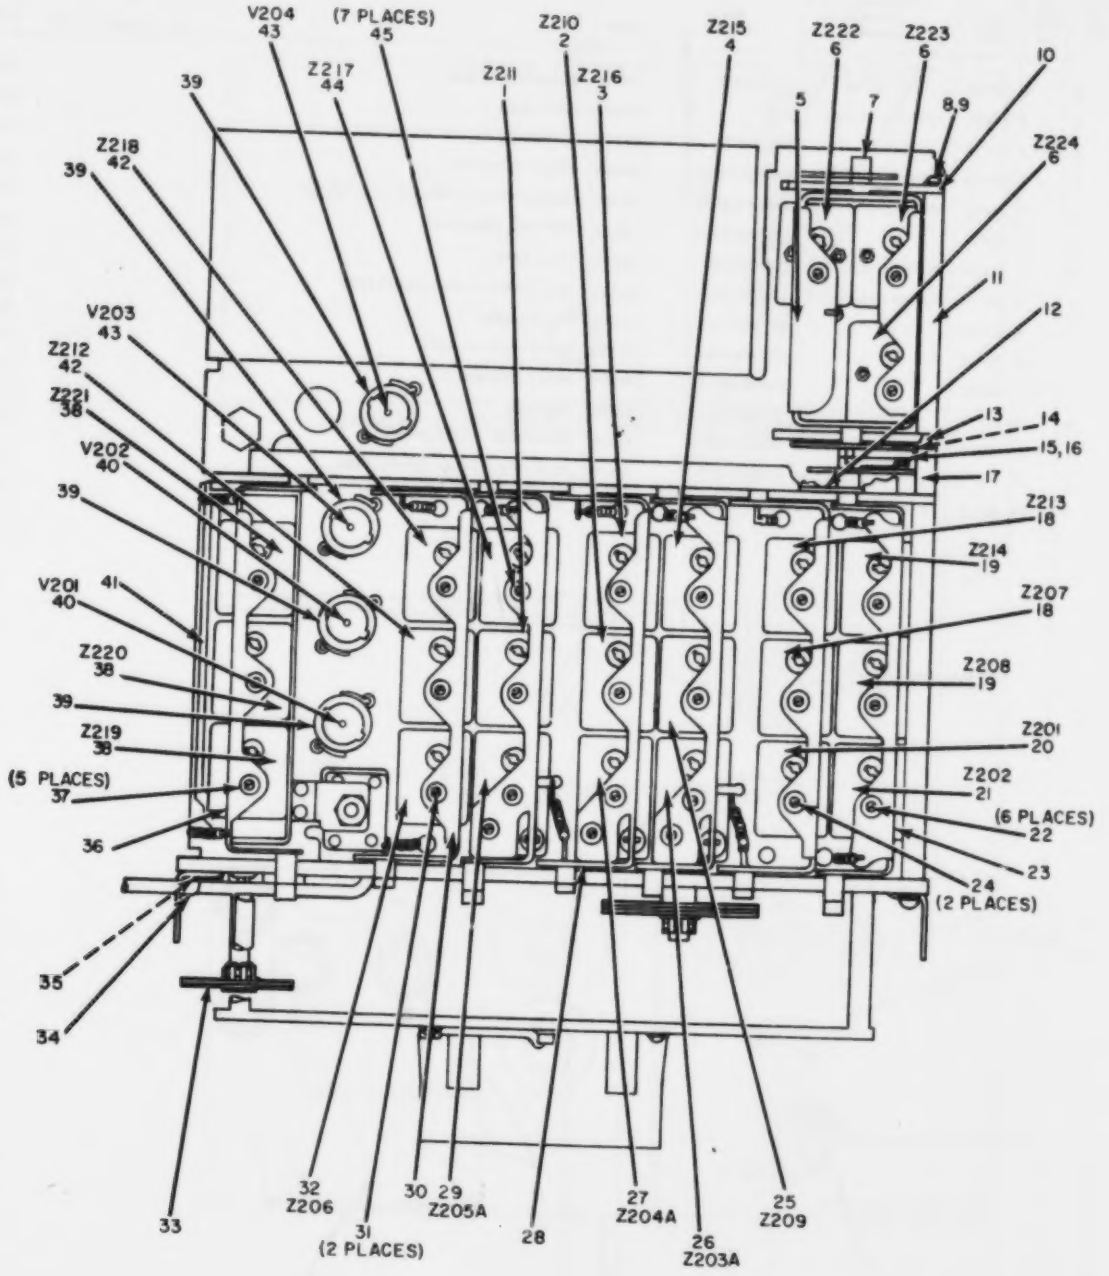

Figure 6. Amplifier, Radio Frequency.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0101 AMPLIFIER,RADIO FREQUENCY		
6	1	PAFZZ	5950-00-392-6561	SMD144686-2	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
6	2	PAFZZ	5950-00-392-6560	SMD144683-1	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
6	3	PAFDD	5820-00-571-1839	SMD144683-2	80063	TUNER,RADIO FREQUENCY	EA	1
6	4	PAFDD	5820-00-571-1838	SMD144681-2	80063	TUNER,RADIO FREQUENCY	EA	1
6	5	XDDZZ		SMC144809	80063	RACK ASSEMBLY	EA	1
6	6	PAFZZ	5950-00-392-6563	SMD144687	80063	TRANSFORMER,RADIO FREQUENCY	EA	3
6	7	XDDZZ		SMC144793	80063	SHAFT ASSEMBLY	EA	1
6	8	XDDZZ		SMD144678-10	80063	NUT	EA	1
6	9	XDDZZ		SMB144708	80063	STUD,PLAIN	EA	1
6	10	XDDZZ		SMB144803	80063	PLATE ASSEMBLY	EA	1
6	11	XDDZZ		SMB144693	80063	SPACER,SLEEVE	EA	4
6	12	XDDZZ		SMC144706	80063	STIFFENER,ELECTRICAL	EA	1
6	13	XDDZZ		SMB144780	80063	PLATE ASSEMBLY	EA	1
6	14	XDDZZ		SMB249257	80063	TERMINAL,SOLDER	EA	1
6	15	XDDZZ		SMB144698	80063	LINK,TERMINAL CONNECTING	EA	1
6	16	PADZZ	5365-00-697-1728	SMB283174-1	80063	RING,RETAINING	EA	2
6	17	XDDZZ		SMB144694	80063	SPACER,SLEEVE	EA	4
6	18	PAFZZ	5950-00-392-6557	SMD144679	80063	TRANSFORMER,RADIO FREQUENCY	EA	2
6	19	PAFZZ	5950-00-392-6558	SMD144680	80063	TRANSFORMER,RADIO FREQUENCY	EA	2
6	20	PAFZZ	5950-00-392-6564	SMD144688	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
6	21	PAFZZ	5950-00-392-6565	SMD144689	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
6	22	PAFZZ	5950-00-645-4583	SMB178749	80063	CORE,ADJUSTABLE TUNING	EA	6
6	23	PAFZZ		SMC144817	80063	RACK ASSEMBLY	EA	1
6	24	XDFZZ		88-2086M00	78488	CORE,ADJUSTABLE TUNING	EA	2
6	25	PAFZZ	5950-00-392-6559	SMD144681-1	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
6	26	PAFDD	5820-00-571-2556	SMD145003	80063	TUNER,RADIO FREQUENCY	EA	1
6	27	PAFDD	5820-00-547-3672	SMD144992	80063	TUNER,RADIO FREQUENCY	EA	1
6	28	PADZZ	5820-00-571-1836	SMC144712	80063	RACK,SLUG	EA	1
6	29	PAFDD	5820-00-571-1837	SMD145011	80063	TUNER,RADIO FREQUENCY	EA	1
6	30	XDDZZ		SMC144774	80063	RACK,SLUG	EA	2
6	31	XDFZZ		SMC178695	80063	CORE,ADJUSTABLE TUNING	EA	2
6	32	PAFZZ	5950-00-392-6569	SMD144691	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
6	33	XDDZZ		SMD144798	80063	GEAR ASSEMBLY	EA	1
6	34	XDDZZ		SMB144700	80063	STRAP,RETAINING	EA	1
6	35	XDDZZ		SMD144678-14	80063	WASHER,FLAT	EA	1
6	36	XDDZZ		SMC144805	80063	RACK,SLUG	EA	1
6	37	PAFZZ	5950-00-645-4584	SMB178751	80063	CORE,ADJUSTABLE TUNING	EA	5
6	38	PAFZZ	5950-00-668-7667	SMD144690	80063	TRANSFORMER,RADIO FREQUENCY	EA	3
6	39	PADZZ	5960-00-860-7709	M24251-6-2	81349	SHIELD,ELECTRON TUBE	EA	4

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
6	40	PADZZ	5960-00-777-3235	26PZ6	49671	ELECTRON TUBE	EA	2
6	41	PAFZZ		SMC144828	80063	RACK ASSEMBLY	EA	1
6	42	PAFZZ	5950-00-392-6562	SMD144692	80063	TRANSFORMER,RADIO FREQUENCY	EA	2
6	43	PADZZ	5960-00-188-0897	26C6	81349	ELECTRON TUBE	EA	2
6	44	PAFDD	5820-00-547-3673	SMD144686-1	80063	TUNER,RADIO FREQUENCY	EA	1
6	45	PAFZZ	5950-00-698-0222	88-1666M00	78488	CORE,ADJUSTABLE TUNING	EA	7

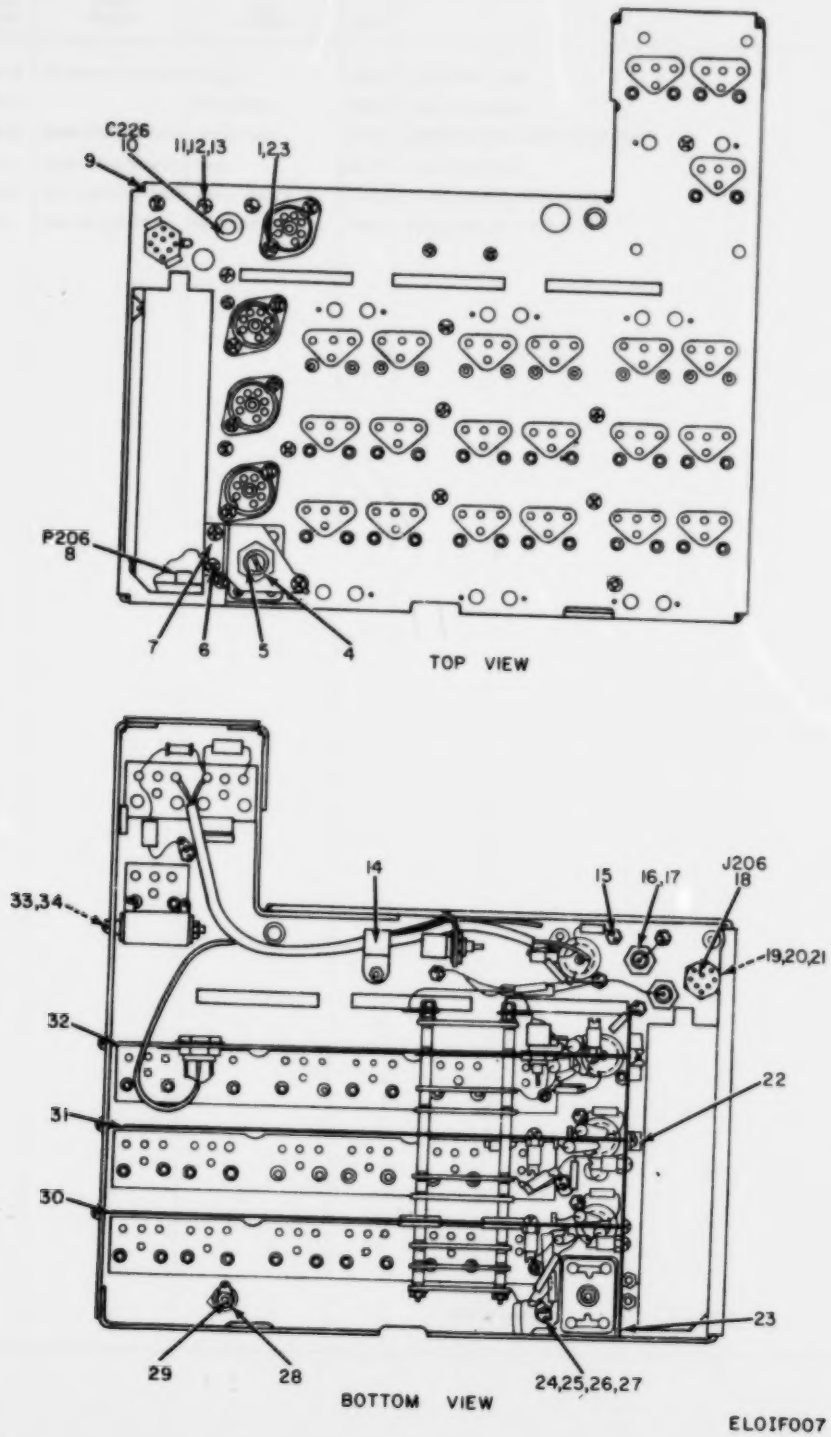

Figure 7. Amplifier, Radio Frequency, Top and Bottom Views.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
7	1	XDDZZ		MS35216-12	96906	SCREW,MACHINE	EA	13
7	2	XDDZZ		SMD144882-14	80063	TERMINAL	EA	3
7	3	XDDZZ		SMD144882-11	80063	NUT,PLAIN,HEXAGON	EA	8
7	4	XDDZZ		SMD144882-10	80063	NUT,PLAIN,HEXAGON	EA	1
7	5	XDDZZ		1720-00	78189	WASHER,LOCK	EA	1
7	6	XDDZZ		MS35216-14	96906	SCREW,MACHINE	EA	5
7	7	XDDZZ		SMC144887	80063	BRACKET,ANGLE	EA	1
7	8	PAFZZ	5935-00-549-1699	82-830	02660	CONNECTOR,PLUG,ELECTRICAL	EA	1
7	9	XDDZZ		SMC144898	80063	CHASSIS ASSEMBLY	EA	1
7	10	XDFZZ		86P4740155	56289	CAPACITOR,FIXED,PAPER	EA	1
7	11	PADZZ	5310-00-550-3715	MS35333-70	96906	WASHER	EA	30
7	12	XDDZZ		SMD144882-13	80063	TERMINAL	EA	11
7	13	XDDZZ		MS35216-11	96906	SCREW,MACHINE	EA	15
7	14	XDDZZ		SMD144882-3	80063	CLAMP,ELECTRICAL	EA	1
7	15	XDDZZ		SMB249265	80063	TERMINAL,INSULATED	EA	1
7	16	XDDZZ		SMD144882-18	80063	SCREW,MACHINE	EA	2
7	17	XDDZZ		SMD144882-7	80063	NUT,PLAIN,HEXAGON	EA	2
7	18	PAFZZ	5935-00-788-8486	MM9M	66099	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
7	19	XDDZZ		SMD144882-9	80063	NUT,PLAIN,HEXAGON	EA	2
7	20	XDDZZ		SMD144882-20	80063	WASHER	EA	1
7	21	PADZZ	5365-00-322-4148	SMB283201	80063	RING,RETAINING	EA	2
7	22	XDDZZ		SMD144882-2	80063	CLAMP,ELECTRICAL	EA	1
7	23	XDDZZ		SMB144896	80063	SHIELD ASSEMBLY	EA	1
7	24	XDDZZ		SMB249256	80063	TERMINAL,SOLDER	EA	3
7	25	XDDZZ		MS35338-78	96906	WASHER,LOCK	EA	1
7	26	XDDZZ		MS35216-18	96906	SCREW,MACHINE	EA	1
7	27	XDDZZ		SMB144762-1	80063	SPACER,SLEEVE	EA	4
7	28	XDDZZ		MS35200-23	96906	SCREW,MACHINE	EA	5
7	29	XDFZZ		SMB144893	80063	CONTACT ASSEMBLY	EA	1
7	30	XDDZZ		SMC144891-2	80063	SHIELD	EA	1
7	31	XDDZZ		SMC144891-1	80063	SHIELD	EA	1
7	32	XDDZZ		SMC144889	80063	SHIELD	EA	1
7	33	XDDZZ		SMD144882-22	80063	WASHER,NONMETALLIC	EA	4
7	34	XDDZZ		104-15-BL	96906	WASHER	EA	1

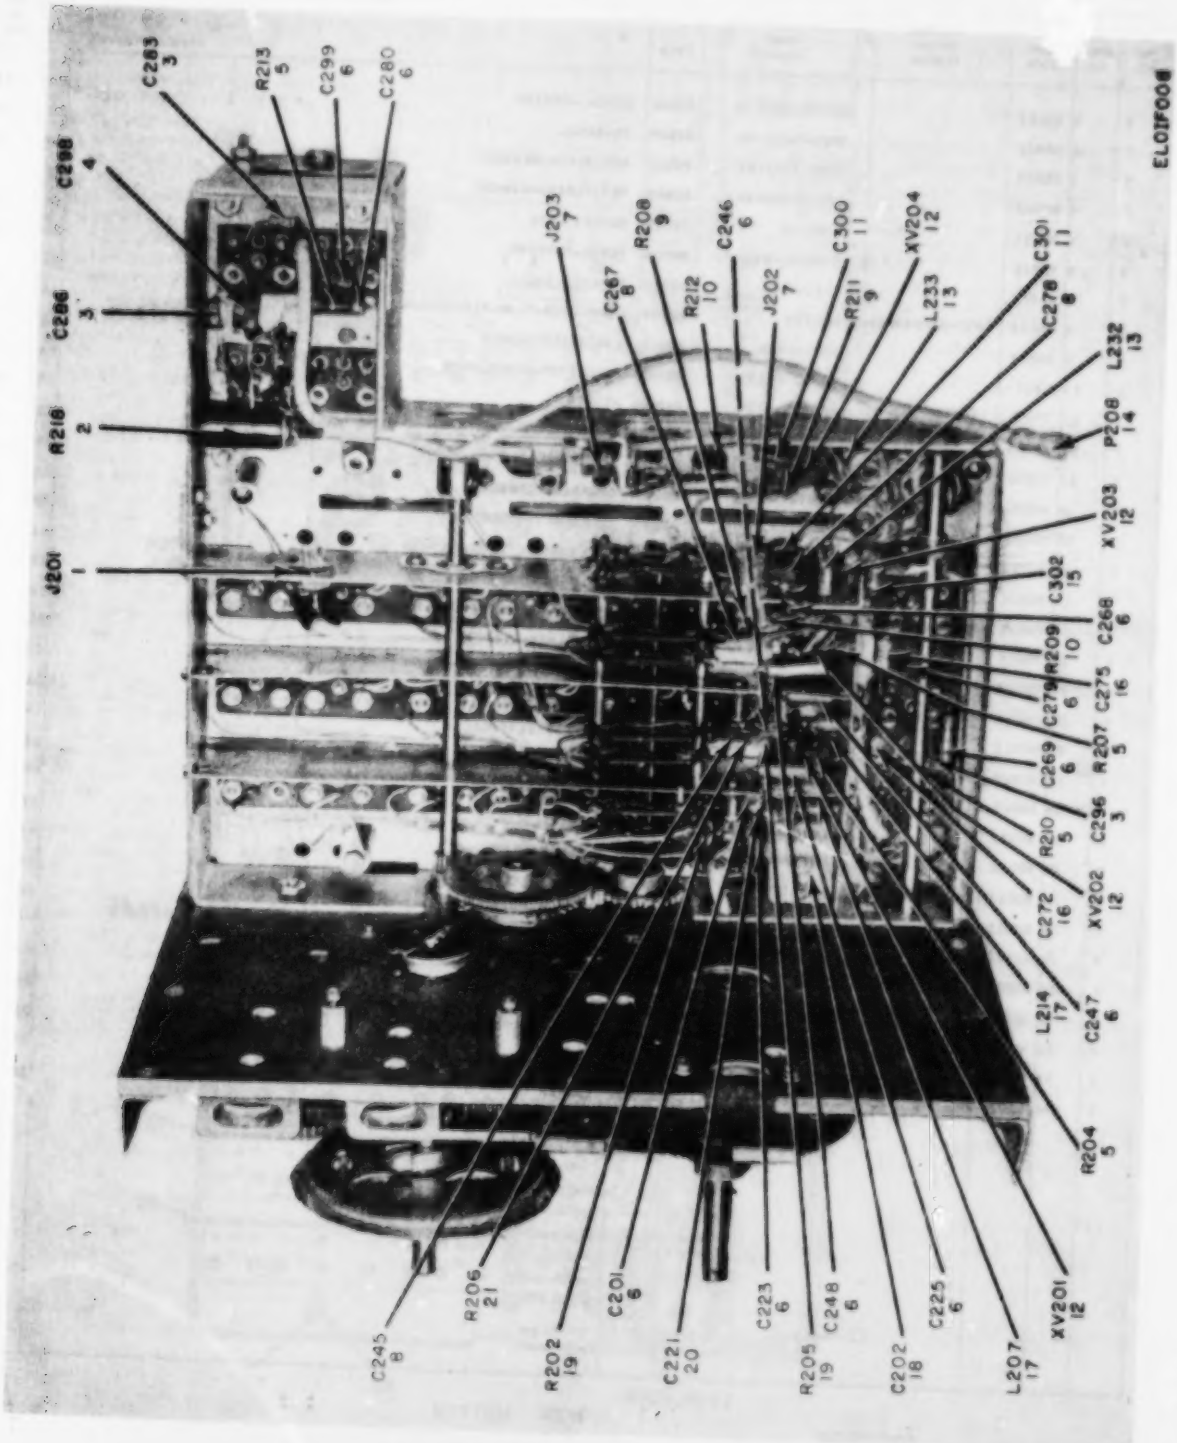

Figure 8. Amplifier, Radio Frequency, Full Bottom Interior View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
8	1	XDFZZ		SMB283200	80063	INSERT,ELECTRICAL CONNECTOR	EA	1
8	2	PAFZZ		RW30V820	81349	RESISTOR,FIXED,WIRE WOUND	EA	1
8	3	PAFZZ	5910-00-855-2389	CC20CJ030D	81349	CAPACITOR,FIXED,CERAMIC	EA	3
8	4	PAFZZ	5910-00-264-9427	CM15E300J	72136	CAPACITOR,FIXED,MICA	EA	1
8	5	PAFZZ	5905-00-110-0196	RCR20G102J5	81349	RESISTOR,FIXED,COMPOSITION	EA	4
8	6	PAFZZ	5910-00-669-3636	196P1030154	56289	CAPACITOR,FIXED,PAPER	EA	11
8	7	PAFZZ	5935-00-244-5728	SC841673	80063	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	2
8	8	PAFZZ	5910-00-060-9619	CM15FD511G03	72136	CAPACITOR,FIXED,MICA	EA	3
8	9	PAFZZ	5905-00-192-3987	RC20GF104K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
8	10	PAFZZ	5905-00-195-6502	RC20GF332K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
8	11	PAFZZ	5910-00-280-8381	ER82426	00656	CAPACITOR,FIXED,CERAMIC	EA	2
8	12	PAFZZ	5935-00-260-0516	TS102P01	81350	SOCKET,ELECTRON TUBE	EA	4
8	13	PAFZZ	5950-00-683-7344	10107-3	82142	COIL,RADIO FREQUENCY	EA	2
8	14	PAFZZ	5935-00-549-1609	82-850	02660	CONNECTOR,PLUG,ELECTRICAL	EA	1
8	15	PAFZZ	5910-00-844-6750	CP10A1K3103K3	56289	CAPACITOR,FIXED,PAPER	EA	1
8	16	PAFZZ	5910-00-543-0506	CC22CK3R5C	81349	CAPACITOR,FIXED,CERAMIC	EA	2
8	17	PAFZZ	5950-00-387-0489	C0047109	95265	COIL,RADIO FREQUENCY	EA	2
8	18	XDFZZ		SMB283234	80063	CAPACITOR,VARIABLE,AIR	EA	1
8	19	PAFZZ	5905-00-279-1754	RC20GF155J	81349	RESISTOR,FIXED,COMPOSITION	EA	2
8	20	PAFZZ	5910-00-842-2292	CC2CCK020D	81349	CAPACITOR,FIXED,CERAMIC	EA	1
8	21	PAFZZ	5905-00-295-3410	RC20GF473K	81349	RESISTOR,FIXED,COMPOSITION	EA	1

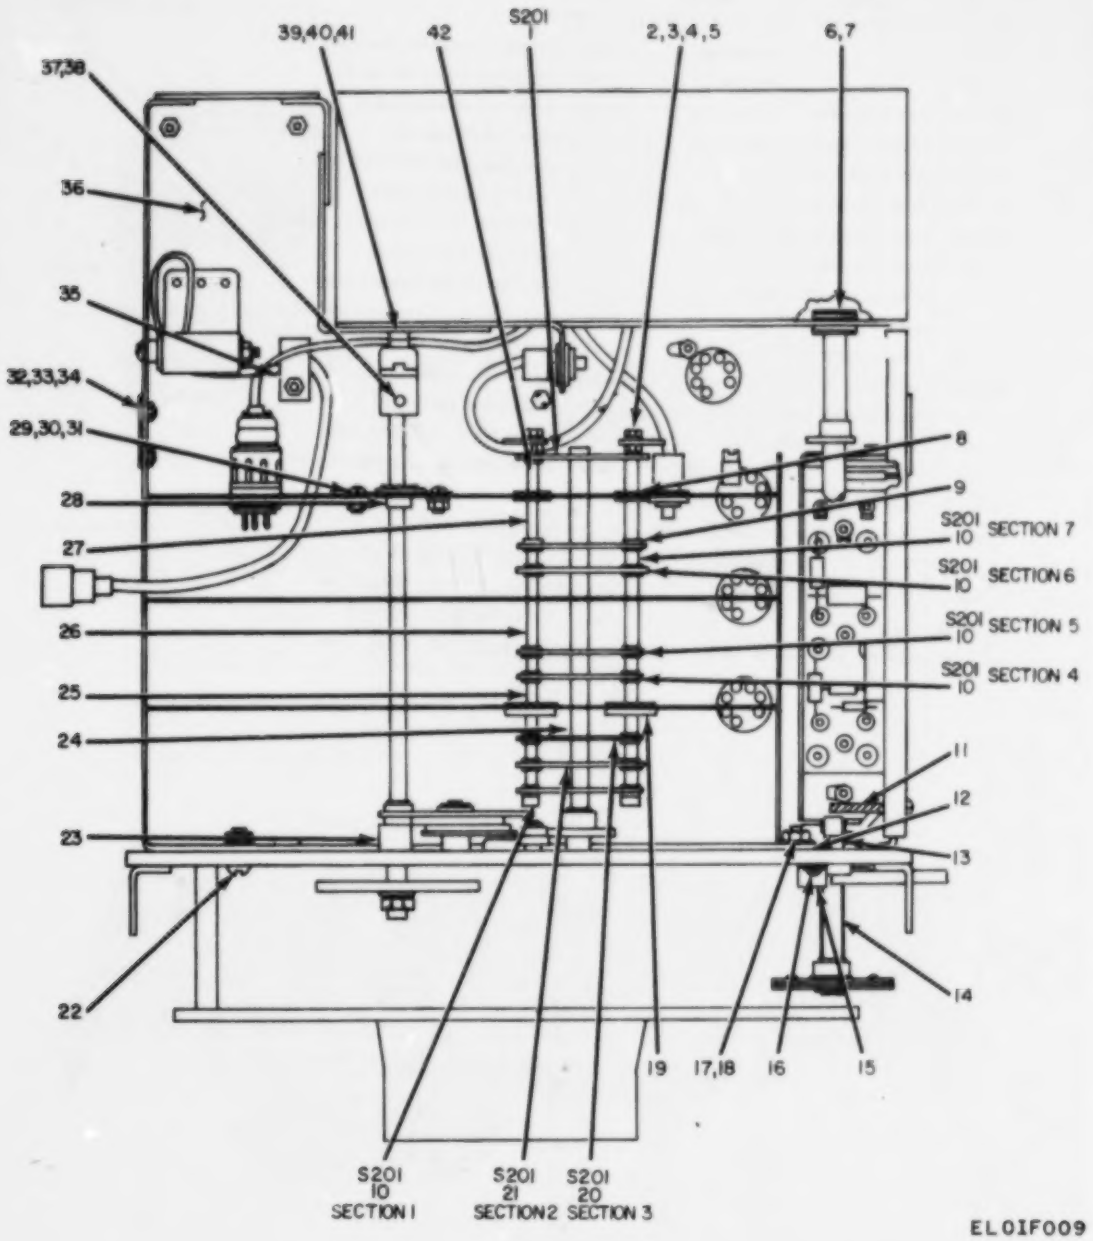

Figure 9. Amplifier, Radio Frequency, Bottom Interior View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	1	XDFZZ		SMB144885	80063	SWITCH SECTION,ROTARY	EA	1
9	2	XDDZZ		SMD144882-8	80063	NUT,PLAIN,HEXAGON	EA	6
9	3	XDDZZ		SMB144890	80063	STUD,PLAIN	EA	2
9	4	XDDZZ		SMB249250	80063	TERMINAL,LUG	EA	2
9	5	PADZZ	5310-00-734-5661	MS35337-78	96906	WASHER,LOCK	EA	12
9	6	XDDZZ		SMD144678-8	80063	RING	EA	1
9	7	XDDZZ		SMB144713	80063	RETAINER,BRACKET	EA	1
9	8	XDDZZ		SMD144882-21	80063	WASHER,FLAT	EA	4
9	9	XDDZZ		SMD144882-6	80063	WASHER,FLAT	EA	32
9	10	PAFZZ	5930-00-644-0229	SMB178789	80063	SWITCH SECTION,ROTARY	EA	5
9	11	XDDZZ		MS35216-22	96906	SCREW,MACHINE	EA	12
9	12	XDDZZ		SMD144678-9	80063	PIN	EA	2
9	13	XDDZZ		SMB144784	80063	STUD ASSEMBLY	EA	1
9	14	XDDZZ		SMB144791	80063	SHAFT ASSEMBLY	EA	1
9	15	XDDZZ		SMD144678-4	80063	STRAP,RETAINING	EA	1
9	16	XDDZZ		MS35216-24	96906	SCREW,MACHINE	EA	1
9	17	XDDZZ		SMD144678-11	80063	NUT,PLAIN,HEXAGON	EA	2
9	18	XDDZZ		SMB144527-2	80063	RING	EA	1
9	19	XDDZZ		SMB144892	80063	WASHER,FLAT	EA	4
9	20	PAFZZ	5930-00-697-3379	SMB144886	80063	SWITCH SECTION,ROTARY	EA	1
9	21	PAFZZ	5930-00-548-6962	SMB144884	80063	SWITCH SECTION,ROTARY	EA	1
9	22	XDDZZ		MS35216-41	96906	SCREW,MACHINE	EA	1
9	23	XDDZZ		SMB144695	80063	SPACER,SLEEVE	EA	4
9	24	XDDZZ		SMB144696	80063	SHAFT,SHOULDER	EA	1
9	25	XDDZZ		SMB249226-6	80063	SPACER,SLEEVE	EA	4
9	26	XDDZZ		SMD144882-5	80063	SPACER,SLEEVE	EA	2
9	27	XDDZZ		SMD144882-4	80063	SPACER,SLEEVE	EA	2
9	28	XDDZZ		SMB178483-2	80063	WASHER,FLAT	EA	1
9	29	XDDZZ		MS35216-23	96906	SCREW,MACHINE	EA	12
9	30	XBDZZ		SMB178759	80063	BEARING,PLAIN,SPHERICAL	EA	1
9	31	PADZZ	5310-00-934-9747	102-356	80063	NUT,PLAIN,HEXAGON	EA	7
9	32	XDDZZ		SMD144678-13	80063	NUT,PLAIN,HEXAGON	EA	4
9	33	PADZZ	5310-00-543-4652	1702-00	78189	WASHER,LOCK	EA	42
9	34	XDDZZ		MS35200-13	96906	SCREW,MACHINE	EA	4
9	35	XBDZZ		SMD144678-5	80063	CLAMP,ELECTRICAL	EA	1
9	36	XDFZZ		SMD149882	80063	CHASSIS,ELECTRICAL EQUIPMENT	EA	1
9	37	XDDZZ		SMB356778	80063	COUPLING,INSULATED	EA	1
9	38	XDDZZ		MS51017-33	96906	SETSCREW	EA	4
9	39	XDDZZ		SMB249201	80063	STRAP,RETAINING	EA	2
9	40	XDDZZ		MS35339-2	96906	WASHER,LOCK	EA	21

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	41	PADZZ	5305-00-059-8460	MS35216-25	96906	SCREW,MACHINE	EA	1
9	42	XDDZZ		SMB249226-2	80063	SPACER,SLEEVE	EA	10

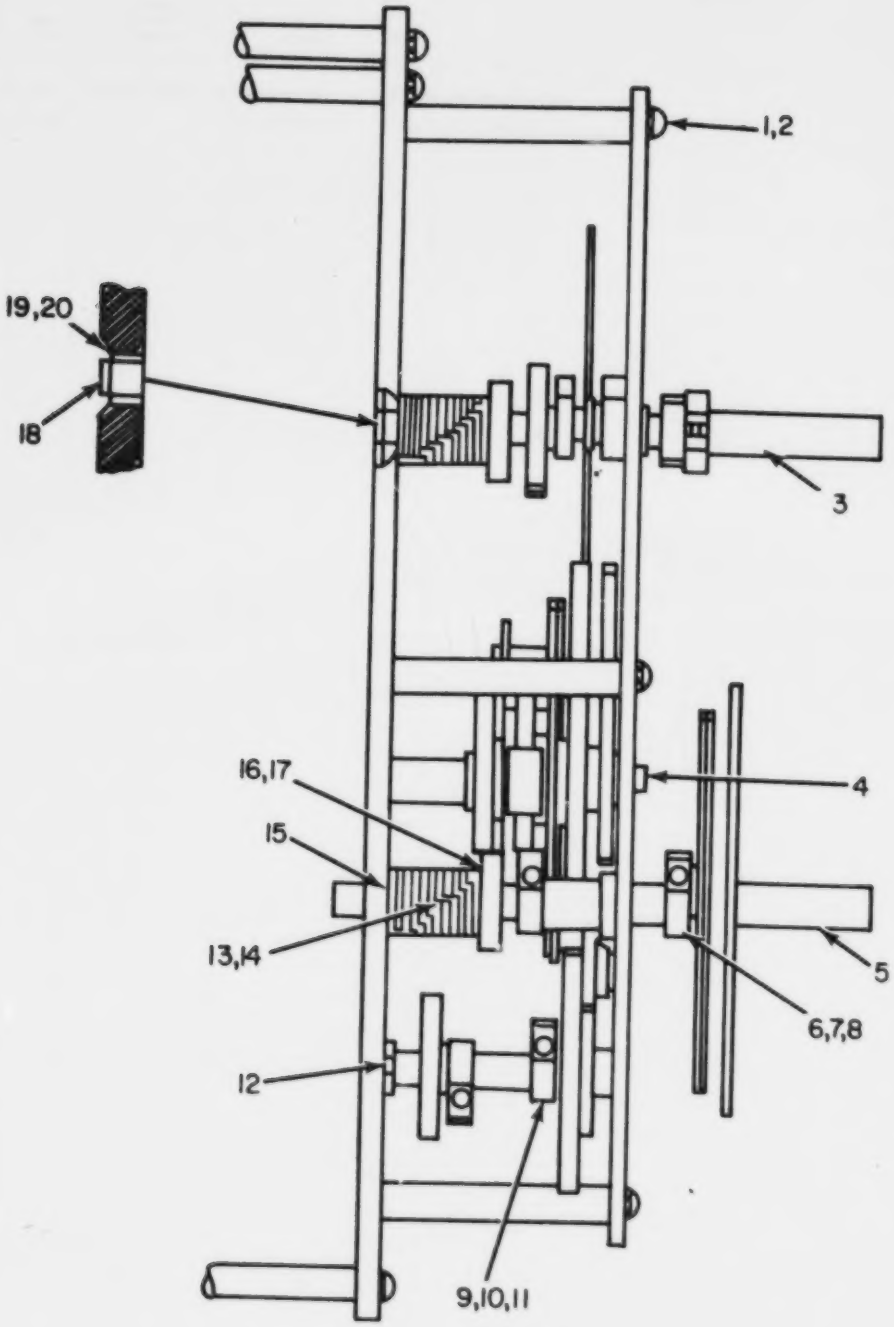

EL0IF010

Figure 10. Amplifier, Radio Frequency, Side View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
10	1	XDDZZ		MS35216-40	96906	SCREW,MACHINE	EA	3
10	2	PADZZ	5310-00-596-7693	MS35335-3	96906	WASHER,LOCK	EA	5
10	3	XDDZZ		SMB144703	80063	SHAFT,SHOULDER	EA	1
10	4	XDDZZ		SMB178830	80063	SCREW,MACHINE	EA	1
10	5	XDDZZ		SMB144705	80063	SHAFT,SHOULDER	EA	1
10	6	XDDZZ		SMD144678-12	80063	NUT,PLAIN,HEXAGON	EA	10
10	7	PAFZZ	5940-00-542-9890	SMB178486	80063	CLAMP,LOOP	EA	3
10	8	XDDZZ		SMD144678-16	80063	SCREW	EA	4
10	9	XDDZZ		MS35337-2	96906	WASHER,LOCK	EA	16
10	10	XDDZZ		SMD144678-15	80063	SCREW	EA	7
10	11	XDDZZ		SMB144451	80063	CLAMP	EA	7
10	12	PADZZ	5365-00-598-1380	SMB283174-3	80063	RING,RETAINING	EA	4
10	13	XDDZZ		SMB248870	80063	WASHER,STOP	EA	22
10	14	XDDZZ		SMB248867	80063	WASHER,FLAT	EA	20
10	15	XDDZZ		SMB248869	80063	WASHER,STOP	EA	2
10	16	XDDZZ		SMB283160	80063	PIN	EA	2
10	17	XDDZZ		SMB248873	80063	COLLAR,SHAFT	EA	2
10	18	PADZZ	5365-00-282-0782	SMB283171-1	80063	RING,RETAINING	EA	2
10	19	XDDZZ		SMB144709	80063	WASHER,FLAT	EA	7
10	20	XDDZZ		SMB144528-2	80063	WASHER,FLAT	EA	10

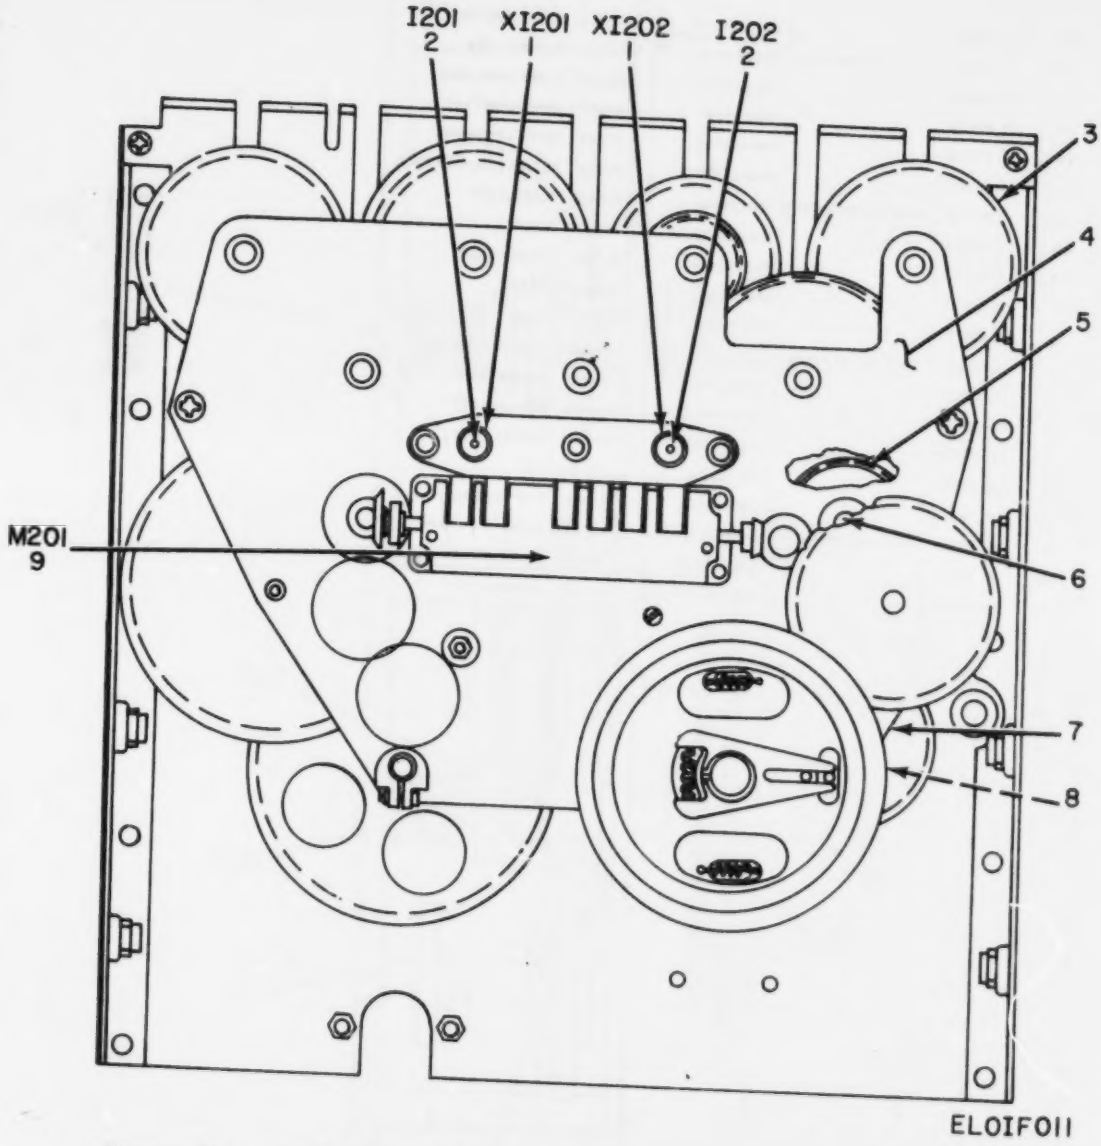

Figure 11. Amplifier, Radio Frequency, Front Panel Rear View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
11	1	XDFZZ		SMB144842	80063	LAMPHOLDER	EA	2
11	2	PAOZZ	6240-00-155-8714	313	08806	LAMP,INCANDESCENT	EA	2
11	3	PAOZZ	5820-00-463-3963	SMD144916	80063	TRAIN ASSEMBLY	EA	1
11	4	XDOZZ		SMD144841	80063	PLATE ASSEMBLY	EA	1
11	5	XDOZZ		SMD144826	80063	GEAR ASSEMBLY	EA	1
11	6	XDOZZ		SMB144704	80063	SHAFT,SHOULDER	EA	2
11	7	XDOZZ		SMC144877	80063	PLATE ASSEMBLY	EA	1
11	8	XDOZZ		SHB283161	80063	PIN	EA	1
11	9	PAFZZ	6680-00-752-7859	AX75818-1	79142	COUNTER,ROTATING,FIXED MOUNTING	EA	1

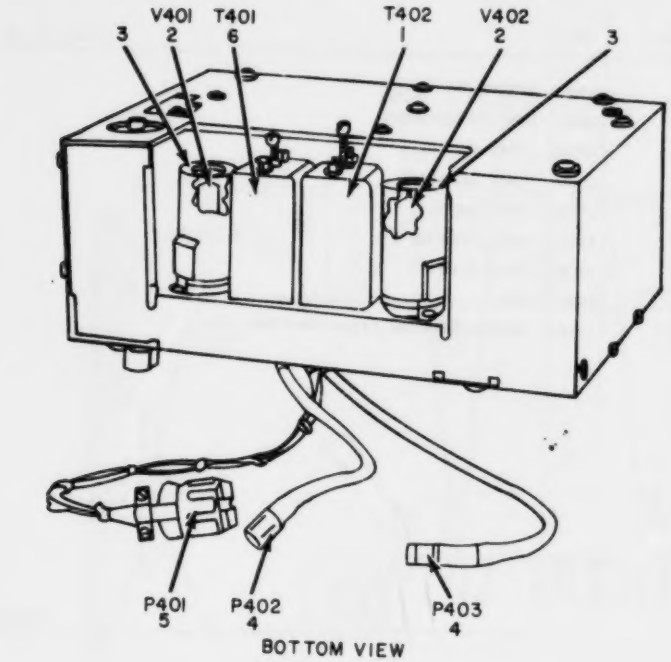

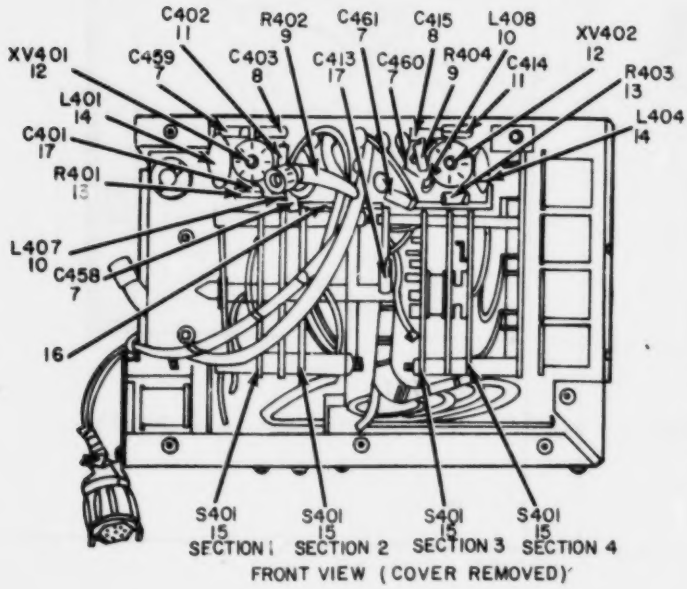

NOT ILLUSTRATED

REF. DES.	ITEM NO.
C405	18
C407	19
C409	20
C411	21
C417	19
C419	22
C421	23
C423	24
C425	21
C427	25
C429	26
C431	27
C433	27
C434	28
C445	29
C447	29
C449	30
C451	31
C453	32
C455	21
C457	20

ELOIF012

Figure 12. Oscillator, Radio Frequency, Crystal Controlled.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0103 OSCILLATOR,RADIO FREQUENCY, CRYSTAL CONTROLLED		
12	1	PAFZZ	5950-00-521-8756	SMD144770	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
12	2	PAOZZ	5960-00-188-3553	6AJ5	81349	ELECTRON TUBE	EA	2
12	3	XDOZZ		SMC143429-1	80063	SHIELD,ELECTRON TUBE	EA	2
12	4	PAFZZ	5935-00-549-1699	82-830	02660	CONNECTOR,PLUG,ELECTRICAL	EA	2
12	5	PAFZZ	5935-00-636-5913	26-191	02660	INSERT,CONNECTOR,ELECTRICAL	EA	1
12	6	PAFZZ	5950-00-645-4860	SMD144771	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
12	7	PAFZZ	5910-00-280-8381	E882426	00656	CAPACITOR,FIXED,CERAMIC	EA	4
12	8	XDFZZ		196P1030251	56289	CAPACITOR,FIXED,PAPER	EA	2
12	9	PAFZZ	5905-00-110-0196	RCR20G102JS	81349	RESISTOR,FIXED,COMPOSITION	EA	2
12	10	PAFZZ	5950-00-683-7344	10107-3	82142	COIL,RADIO FREQUENCY	EA	2
12	11	PAFZZ	5910-00-270-4853	CM15E820G	72136	CAPACITOR,FIXED,MICA	EA	2
12	12	PAFZZ	5935-00-260-0516	TS102P01	81350	SOCKET,ELECTRON TUBE	EA	2
12	13	PAFZZ	5905-00-192-3987	RC20GF104K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
12	14	PAFZZ	5950-00-387-0489	C0047109	95265	COIL,RADIO FREQUENCY	EA	2
12	15	PAFZZ	5930-00-636-4625	SMC145036	80063	SWITCH SECTION,ROTARY	EA	4
12	16	XDOZZ		SMC144754	80063	BRACKET ASSEMBLY	EA	1
12	17	PAFZZ	5910-00-264-9420	300-1	80063	CAPACITOR,FIXED,MICA	EA	2
12	18	PAFZZ	5910-00-063-0695	CM15E680G	72136	CAPACITOR,FIXED,MICA	EA	1
12	19	PAFZZ	5910-00-984-8373	CM15FD101GP3	72136	CAPACITOR,FIXED,MICA	EA	2
12	20	PAFZZ	5910-00-892-9904	CM15ED390G03	72136	CAPACITOR,FIXED,MICA	EA	2
12	21	XDFZZ		CM15D270J	72136	CAPACITOR,FIXED,MICA	EA	3
12	22	PAFZZ	5910-00-832-5722	CM15FD750G03	72136	CAPACITOR,FIXED,MICA	EA	1
12	23	XDFZZ		CM15D820J	81349	CAPACITOR,FIXED,MICA	EA	1
12	24	PAFZZ	5910-00-044-4067	CM15D430J	72136	CAPACITOR,FIXED,MICA	EA	1
12	25	PAFZZ	5910-00-681-6994	CM15E151G	72136	CAPACITOR,FIXED,MICA	EA	1
12	26	PAFZZ	5910-00-227-0793	CM15E101J	72136	CAPACITOR,FIXED,MICA	EA	1
12	27	PAFZZ	5910-00-926-9776	CM15FD620G03	72136	CAPACITOR,FIXED,MICA	EA	2
12	28	XDFZZ		CM15D681G	72136	CAPACITOR,FIXED,MICA	EA	1
12	29	PAFZZ	5910-00-668-7937	CM15B100J	72136	CAPACITOR,FIXED,MICA	EA	2
12	30	XDFZZ		CM15D120J	72136	CAPACITOR,FIXED,MICA	EA	1
12	31	PAFZZ	5910-00-264-9420	CM15C200J	72136	CAPACITOR,FIXED,MICA	EA	1
12	32	PAFZZ	5910-00-241-0449	CM15D240J	72136	CAPACITOR,FIXED,MICA	EA	1

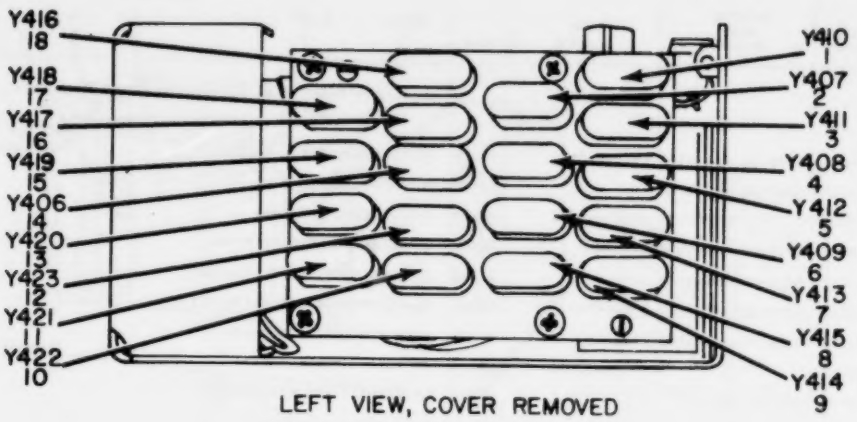

LEFT VIEW, COVER REMOVED

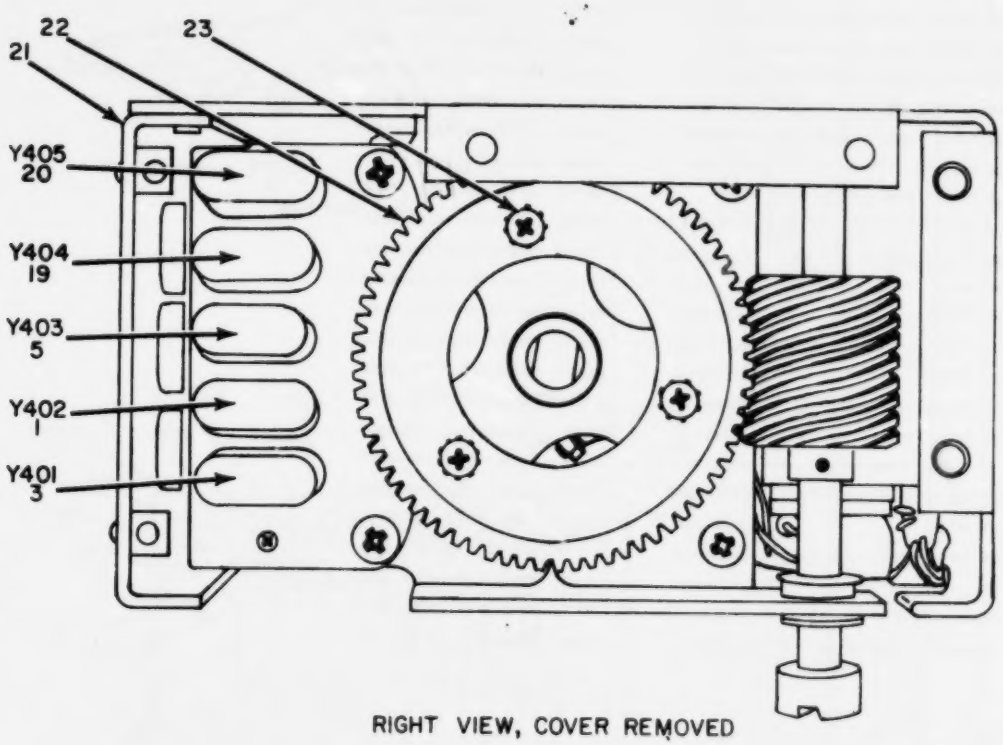

RIGHT VIEW, COVER REMOVED

ELOIF013

Figure 13. Oscillator, Radio Frequency, Crystal Controlled, Left and Right Views, Cover Removed.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
13	1	XDFZZ		CR18U80G0KC	81349	CRYSTAL UNIT,QUARTZ	EA	2
13	2	XDFZZ		CR18U15G00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	3	PAFZZ	5955-00-248-0686	CR18U9G00KC	81349	CRYSTAL UNIT,QUARTZ	EA	2
13	4	XDFZZ		CR18AU6200-000KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	5	PAFZZ	5955-00-892-3760	CR18AU10-000000MHZ	81349	CRYSTAL UNIT,QUARTZ	EA	2
13	6	PAFZZ	5955-00-089-3073	CR18AU14-000000MHZ	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	7	XDFZZ		CR18AU11G00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	8	PAFZZ	5955-00-187-1914	CR18U850G-00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	9	PAFZZ	5955-00-709-5335	CR18AU13G00-00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	10	PAFZZ	5955-00-709-5430	CR18U10500-00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	11	PAFZZ	5955-00-728-5535	CR18AU115000-0MHC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	12	PAFZZ	5955-00-734-4826	CR18AU950G-C00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	13	PAFZZ	5955-00-667-2409	CR18AU12500-00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	14	PAFZZ	5955-00-058-3937	CR18AU12-000000MHZ	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	15	PAFZZ	5955-00-786-1497	CR18AU9666-667KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	16	XDFZZ		CR18U10666-67KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	17	PAFZZ	5955-00-667-2436	CR18U10333-333KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	18	PAFZZ	5955-00-842-3947	CR19AY11333-333KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	19	XDFZZ		CR18U12600KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	20	XDFZZ		CR18U7CC0-G00KC	81349	CRYSTAL UNIT,QUARTZ	EA	1
13	21	XDFZZ		SMC144729	80063	COVER,CRYSTAL	EA	1
13	22	XDFZZ		SM8144726	80063	WHEEL,OSCILLATOR	EA	1
13	23	XDDZZ		MS35216-11	96906	SCREW,MACHINE	EA	3

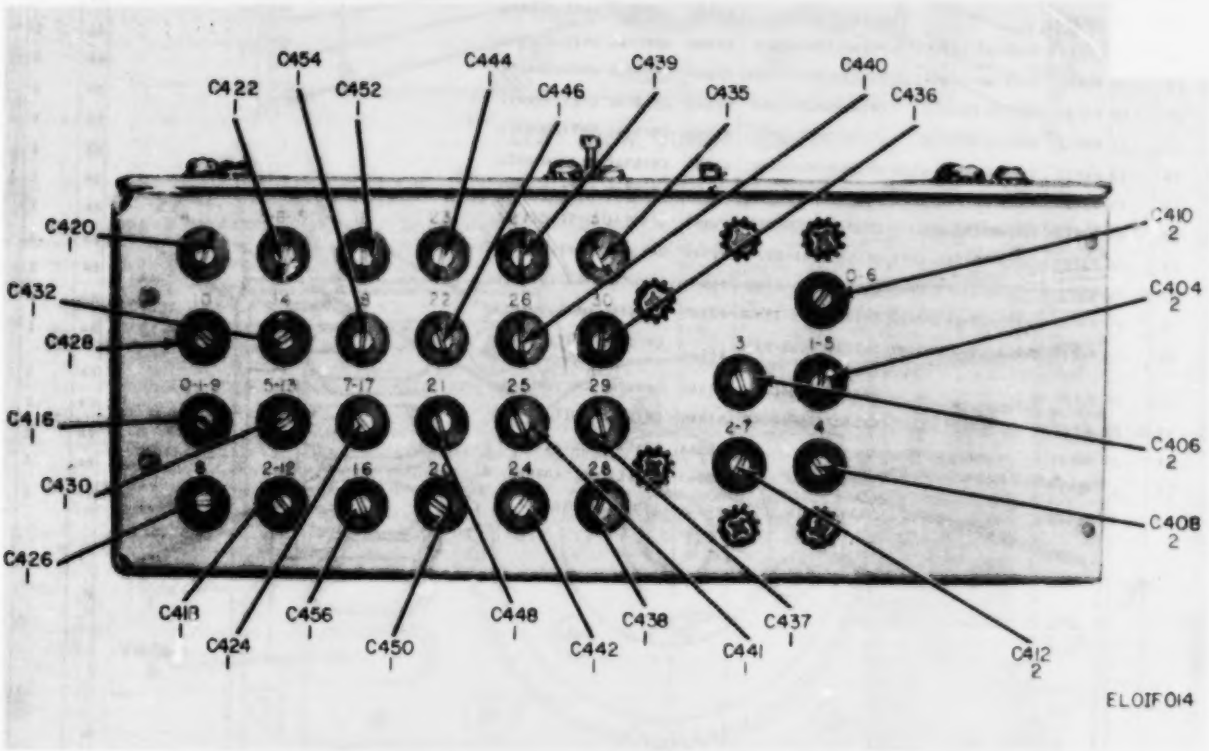

Figure 14. Oscillator, Radio Frequency, Crystal Controlled, Top View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
14	1	XDFZZ		SMB145035	80063	CAPACITOR ASSEMBLY	EA	24
14	2	XDFZZ		SMB144748	80063	CAPACITOR ASSEMBLY	EA	5

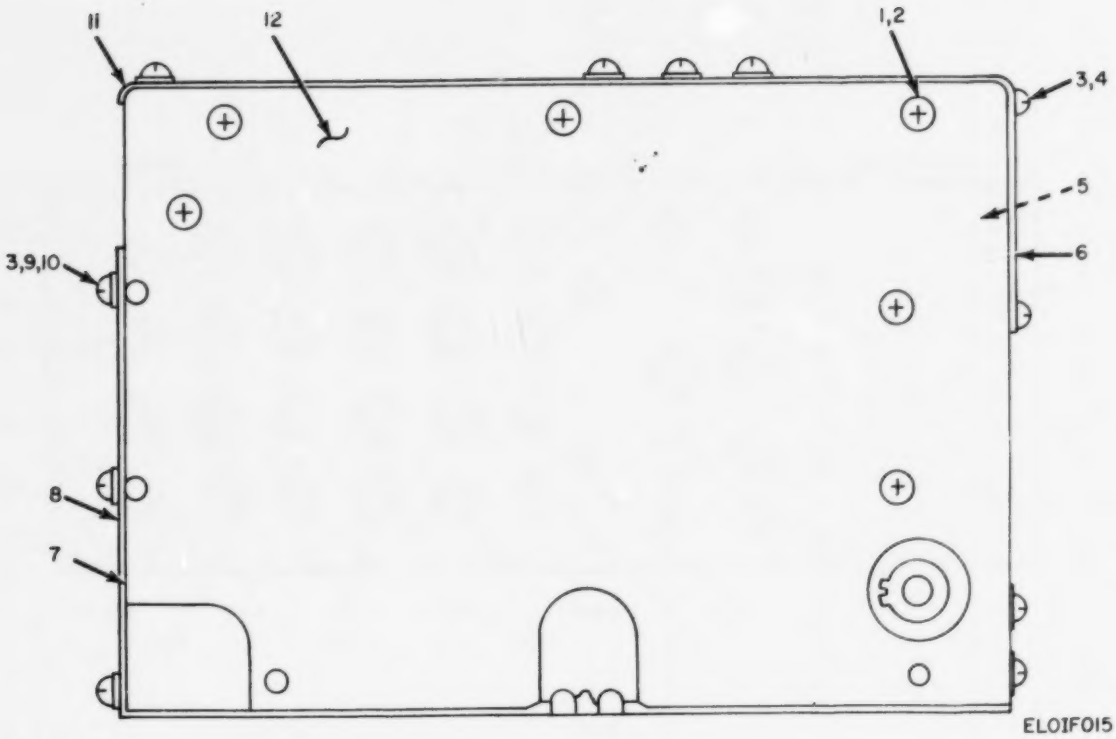

Figure 15. Oscillator, Radio Frequency, Crystal Controlled, Chassis Assembly, Side View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
15	1	XDDZZ		MS35216-22	96906	SCREW,MACHINE	EA	14
15	2	XDDZZ		7S35335-16	96906	WASHER	EA	14
15	3	XDDZZ		MS35216-12	96906	SCREW,MACHINE	EA	5
15	4	PADZZ	5310-00-616-3554	MS35335-15	96906	WASHER	EA	2
15	5	XDDZZ		SMB144718	80063	INSULATOR,PLATE	EA	1
15	6	XDFZZ		SMB144719	80063	COVER,CRYSTAL	EA	1
15	7	XDDZZ		SMB144717	80063	INSULATOR,PLATE	EA	1
15	8	XDFZZ		SMB144767	80063	COVER,CRYSTAL	EA	1
15	9	XDDZZ		MS15795-304	96906	WASHER	EA	3
15	10	XDDZZ		MS35338-78	96906	WASHER,LOCK	EA	3
15	11	XDFZZ		SMB144720	80063	COVER,OSCILLATOR	EA	1
15	12	XDFZZ		SMD144724	80063	OSCILLATOR ASSEMBLY	EA	1

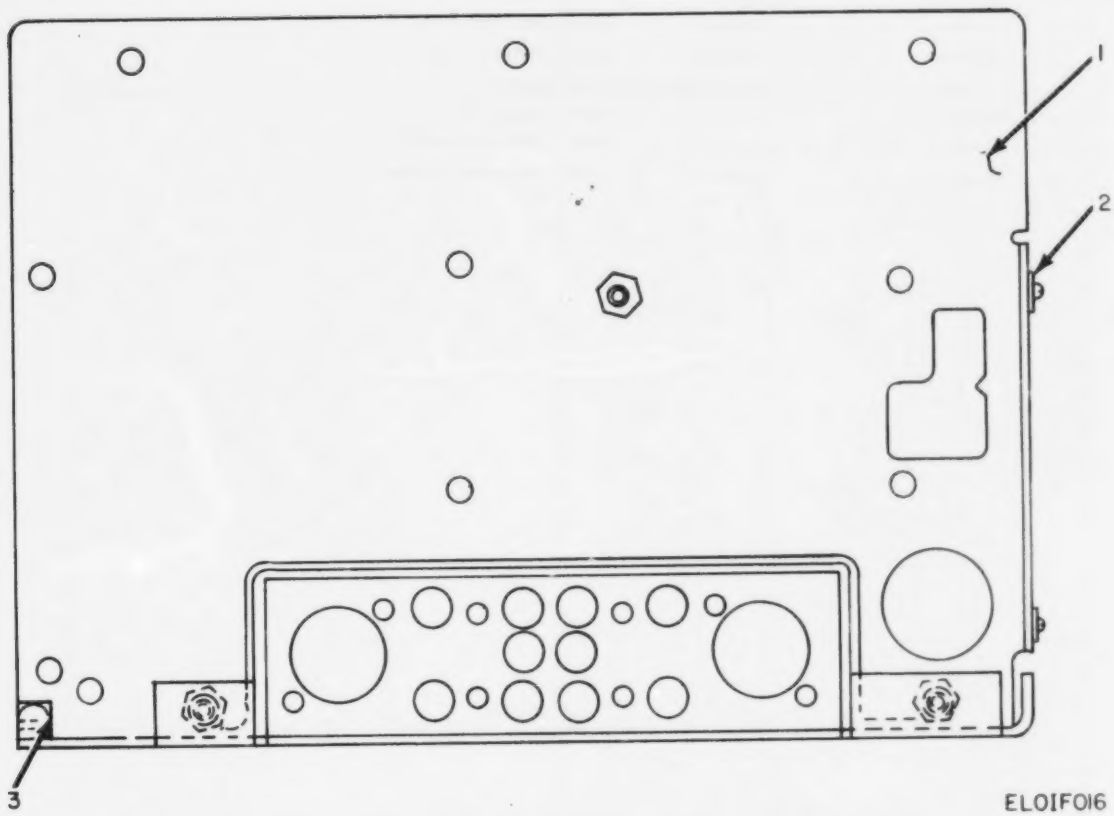

Figure 16. Oscillator, Radio Frequency, Crystal Controlled, Chassis Assembly, Front View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION *USABLE ON CODE*	(7) U/M	(8) QTY INC IN UNIT
16	1	XDDZZ		SMC144731	80063	CHASSIS,OSCILLATOR	EA	1
16	2	XDDZZ		SMC283184-2	80063	NUT,INSERT,CAPTIVE	EA	24
16	3	XDDZZ		SMB144721	80063	INSERT,SCREW,THREADED	EA	5

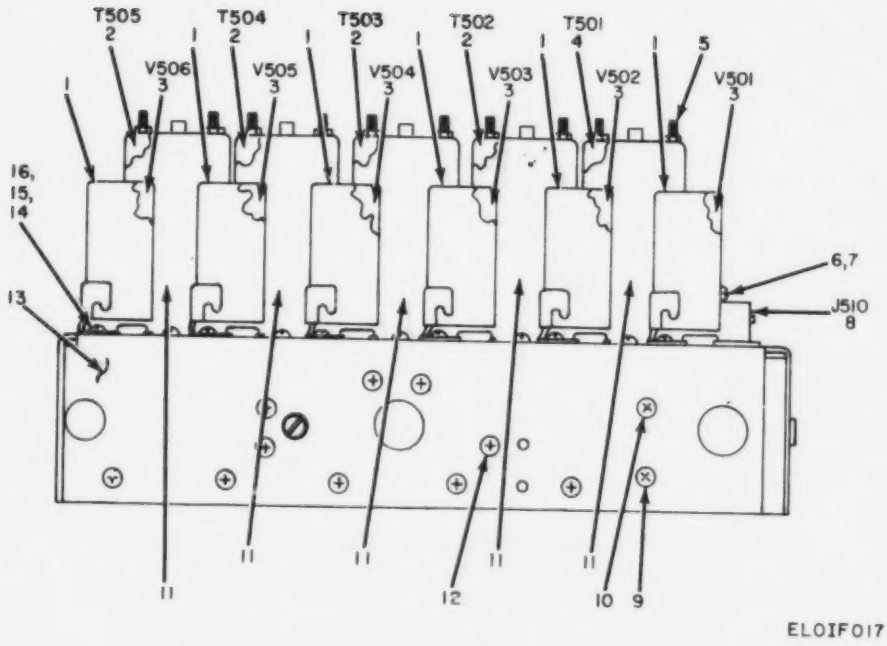

Figure 17. Amplifier, Intermediate Frequency.

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0104 AMPLIFIER,INTERMEDIATE FREQUENCY		
17	1	PACZZ	5960-00-860-7709	M24251-6-2	81349	SHIELD,ELECTRON TUBE	EA	6
17	2	PAFZZ	5950-00-648-1977	SMD144534	80063	TRANSFORMER,INTERMEDIATE FREQUENCY	EA	4
17	3	PAOZZ	5960-00-188-0827	26A6	81349	ELECTRON TUBE	EA	6
17	4	PAFZZ	5950-00-648-2370	SMD144535	80063	TRANSFORMER,INTERMEDIATE FREQUENCY	EA	1
17	5	PAFZZ	5310-00-616-3554	MS35335-29	96906	WASHER	EA	10
17	6	XDDZZ		SMD144532-11	80063	SCREW	EA	12
17	7	XDDZZ		SMD144532-8	80063	WASHER	EA	4
17	8	PAFZZ	5935-00-201-3511	UG290AU	80058	CONNECTOR,RECEPTACLE	EA	1
17	9	XDDZZ		MS35200-14	96906	SCREW,MACHINE	EA	1
17	10	XDDZZ		MS35200-13	96906	SCREW,MACHINE	EA	6
17	11	XDFZZ		SMB178526	80063	SHIELD,COIL	EA	5
17	12	XDDZZ		MS35200-11	96906	SCREW,MACHINE	EA	1
17	13	XDDZZ		SMC144556	80063	CHASSIS ASSEMBLY	EA	1
17	14	XDDZZ		MS35216-12	96906	SCREW,MACHINE	EA	13
17	15	PADZZ	5310-00-950-1310	MS15795-204	96906	WASHER	EA	12
17	16	XDDZZ		MS35649-44	96906	NUT	EA	37

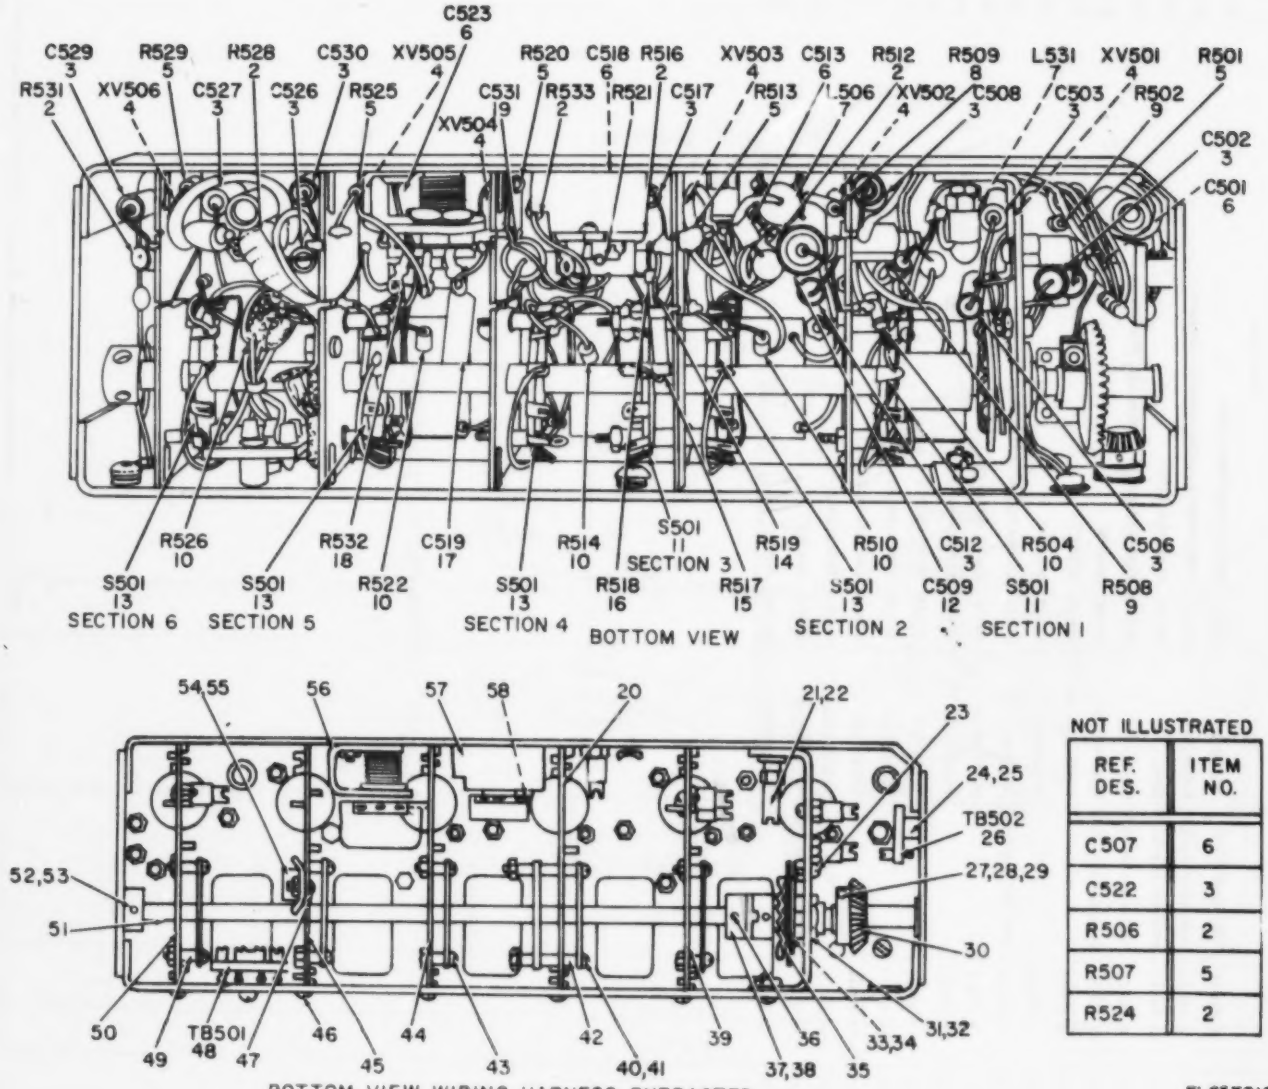

NOT ILLUSTRATED

REF. DES.	ITEM NO.
C507	6
C522	3
R506	2
R507	5
R524	2

ELOIFOI8

Figure 18. Amplifier, Intermediate Frequency, Bottom Views.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
18	1	PAFZZ	5905-00-806-3627	SMB144536	80063	RESISTOR,VARIABLE	EA	1
18	2	PAFZZ	5905-00-110-0196	RCR20G102JS	81349	RESISTOR,FIXED,COMPOSITION	EA	7
18	3	PAFZZ	5910-00-669-3636	196P103015S4	56289	CAPACITOR,FIXED,PAPER	EA	11
18	4	PAFZZ	5935-00-260-0516	TS102P01	81350	SOCKET,ELECTRON TUBE	EA	6
18	5	PAFZZ	5905-00-114-5398	RCR20G225JS	81349	RESISTOR,FIXED,COMPOSITION	EA	6
18	6	PAFZZ	5910-00-866-8877	CM15D471G	81349	CAPACITOR,FIXED,MICA	EA	5
18	7	PAFZZ	5950-00-387-0489	C0047109	95265	COIL,RADIO FREQUENCY	EA	2
18	8	PAFZZ	5905-00-111-8357	RCR20G681JS	81349	RESISTOR,FIXED,COMPOSITION	EA	1
18	9	PAFZZ	5905-00-192-3987	RC20GF104K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
18	10	XDFZZ		NA15X2R70J	81349	RESISTOR,FIXED,FILM	EA	5
18	11	PAFZZ	5930-00-548-9455	SMB178517	80063	SWITCH SECTION,ROTARY	EA	2
18	12	PAFZZ	5910-00-899-4395	CP09A1KB104K3	56289	CAPACITOR,FIXED,PAPER	EA	1
18	13	PAFZZ	5930-00-503-4704	SMB178518	80063	SWITCH SECTION,ROTARY	EA	4
18	14	PAFZZ	5905-00-224-6388	MILR55182-5	81349	RESISTOR,FIXED,FILM	EA	1
18	15	PAFZZ	5905-00-539-3234	RN20X6811F	81349	RESISTOR,FIXED,FILM	EA	1
18	16	PAFZZ	5905-00-556-5228	RN70B1822F	81349	RESISTOR,FIXED,FILM	EA	1
18	17	PAFZZ	5910-00-821-4702	CP05A1KE103K3	56289	CAPACITOR,FIXED,PAPER	EA	1
18	18	PAFZZ	5905-00-806-3628	SMC2832005-1	80063	RESISTOR,VARIABLE	EA	1
18	19	PAFZZ	5910-00-818-9758	CP05A1KB224K3	81349	CAPACITOR,FIXED,PAPER	EA	1
18	20	XDDZZ		SMC144544	80063	SHIELD,COIL	EA	1
18	21	PADZZ	5940-00-665-5764	103A2	92825	TERMINAL,STUD	EA	20
18	22	XDDZZ		MS35216-11	96906	SCREW,MACHINE	EA	18
18	23	XDDZZ		SMB249256	80063	TERMINAL,LUG	EA	3
18	24	XDDZZ		MS35200-22	96906	SCREW,MACHINE	EA	2
18	25	XDDZZ		MS35338-21	96906	WASHER	EA	6
18	26	XDFZZ		SMB144553	80063	TERMINAL BOARD	EA	1
18	27	XDDZZ		SMD144532-15	80063	NUT	EA	3
18	28	XDDZZ		SMD144532-12	80063	SCREW,MACHINE	EA	1
18	29	XDDZZ		SMB144451	80063	CLAMP	EA	1
18	30	PAFZZ	3020-00-777-1617	SMB144542	80063	GEAR,BEVEL	EA	1
18	31	XDDZZ		MS35216-23	96906	SCREW,MACHINE	EA	2
18	32	XDDZZ		SMC144539	80063	SHIELD,COIL	EA	1
18	33	XDDZZ		SMD144532-14	80063	SCREW,MACHINE	EA	2
18	34	XDDZZ		SMD144532-6	80063	WASHER,LOCK	EA	2
18	35	PAFZZ	5930-00-806-6113	SMB144533	80063	DETENT,SWITCH	EA	1
18	36	XDDZZ		SMB283169	80063	SETSCREW	EA	6
18	37	XDDZZ		AN565D6L2	88044	SCREW,FLUTED	EA	4
18	38	XDDZZ		SMD144532-4	80063	NUT,PLAIN,HEXAGON	EA	1
18	39	XDDZZ		SMC144538	80063	SHIELD,COIL	EA	1
18	40	XDDZZ		SMD144532-9	80063	WASHER	EA	24

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
18	41	XDDZZ		SMD144532-13	80063	SCREW,MACHINE	EA	5
18	42	XDDZZ		SMB249226-2	80063	SPACER,SLEEVE	A	12
18	43	XDDZZ		AN500C4-10	88044	SCREW	EA	5
18	44	XDDZZ		SMC144545	80063	SHIELD,COIL	EA	1
18	45	XDDZZ		SMC144546	80063	SHIELD,COIL	EA	1
18	46	XDDZZ		MS35216-13	96906	SCREW,MACHINE	EA	10
18	47	XDDZZ		AN500C4-8	88044	SCREW	EA	3
18	48	XDFZZ		SMB144550	80063	TERMINAL BOARD	EA	1
18	49	XDDZZ		SMB249226-1	80063	SPACER,SLEEVE	EA	12
18	50	XDDZZ		SMC144547	80063	SHIELD,COIL	EA	1
18	51	XDDZZ		SMB144537	80063	SHAFT,STRAIGHT	EA	1
18	52	XDDZZ		SMB144527	80063	SPACER,SLEEVE	EA	2
18	53	XDDZZ		SMD144532-7	80063	WASHER	EA	1
18	54	XDDZZ		SMB143409	80063	TERMINAL,LUG	EA	2
18	55	XDFZZ		SMD144532-9	80063	CLAMP,CABLE	EA	1
18	56	XDDZZ		SMB144548	80063	BRACKET ASSEMBLY	EA	1
18	57	XDDZZ		SMB144559	80063	BRACKET ASSEMBLY	EA	1
18	58	XDDZZ		MS35200-12	96906	SCREW,MACHINE	EA	4

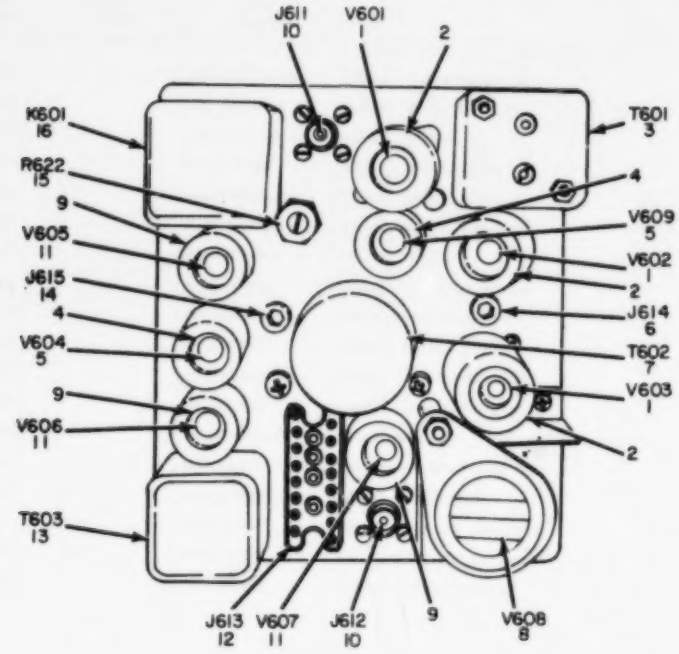

TOP VIEW

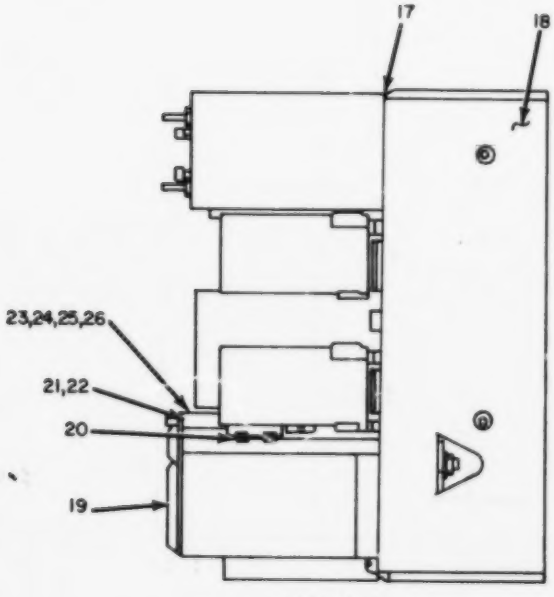

SIDE VIEW

ELOIF019

Figure 19. Amplifier, Audio Frequency.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0105 AMPLIFIER,AUDIO FREQUENCY		
19	1	PAOZZ	5960-00-166-7663	12AU7	81349	ELECTRON TUBE	EA	3
19	2	PAOZZ	5960-00-860-7710	M24251-6-5	81349	SHIELD,ELECTRON TUBE	EA	3
19	3	PAFZZ	5950-00-648-2385	SMD144562	80063	TRANSFORMER,INTERMEDIATE FREQUENCY	EA	1
19	4	PAOZZ	5960-00-860-7709	M24251-6-2	81349	SHIELD,ELECTRON TUBE	EA	2
19	5	PAOZZ	5960-00-188-0827	26A6	81349	ELECTRON TUBE	EA	2
19	6	PAFZZ	5935-00-501-5488	105-603-5	74970	JACK,TIP	EA	1
19	7	PAFZZ	5950-00-568-4844	SMC144565	80063	TRANSFORMER,RADIO FREQUENCY	EA	1
19	8	PAOZZ	5960-00-100-7111	26A7GT	81349	ELECTRON TUBE OR	EA	1
19	8	PAOHH	5820-00-448-6763	SMC356720	80063	AUDIO MODULE ASSEMBLY	EA	1
19	9	XDOZZ		SMC143629-1	80063	SHIELD,ELECTRON TUBE	EA	3
19	10	PAFZZ	5935-00-201-3511	UG290AU	80058	CONNECTOR,RECEPTACLE	EA	2
19	11	PAOZZ	5960-00-188-3551	6AJ5	81349	ELECTRON TUBE	EA	3
19	12	PAFZZ	5935-00-660-5590	126-806	02660	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
19	13	PAFZZ	5950-00-812-6106	SMC144571	80063	TRANSFORMER,AUDIO FREQUENCY	EA	1
19	14	PAFZZ	5935-00-501-3487	105-602-5	74970	JACK,TIP	EA	1
19	15	XDFZZ		SMB144563	80063	RESISTOR,VARIABLE	EA	1
19	16	PAFZZ	5945-00-258-9852	SMC144572	80063	RELAY,ARMATURE	EA	1
19	17	XDOZZ		SMB178526	80063	SHIELD,COIL	EA	1
19	18	XDOZZ		SMC144589	80063	CHASSIS ASSEMBLY	EA	1
19	19	XDFZZ		SMB144567	80063	RETAINER,ELECTRON TUBE	EA	1
19	20	XDOZZ		SMB144573	80063	SHIELD,COIL	EA	1
19	21	XDOZZ		SMB144568	80063	SHAFT,STRAIGHT	EA	1
19	22	PAFZZ	5820-00-537-4822	SMB178564	80063	SPRING,HELICAL,COMPRESSION	EA	1
19	23	XDOZZ		MS35335-2	96906	WASHER,LOCK	EA	11
19	24	XDOZZ		MS35216-24	96906	SCREW,MACHINE	EA	4
19	25	PAFZZ	5365-00-285-6688	5133-15	79136	RING,RETAINING	EA	1
19	26	PADZZ	5310-00-934-9747	102-356	80063	NUT,PLAIN,HEXAGON	EA	9

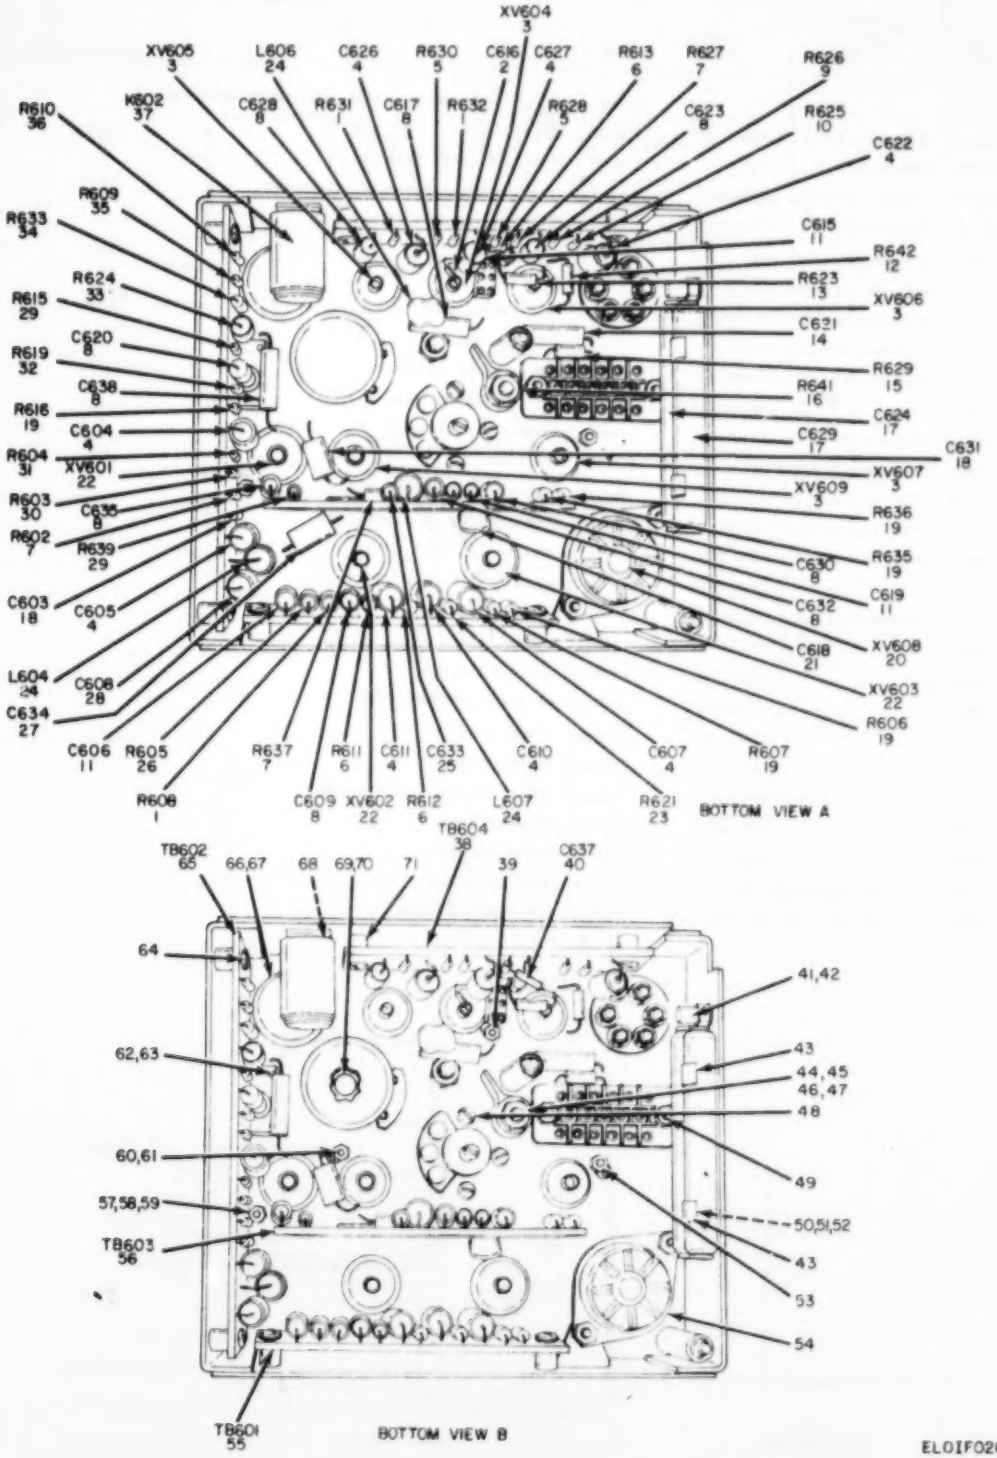

Figure 20. Amplifier, Audio Frequency, Bottom Interior Views.

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
20	1	PAFZZ	5905-00-185-6946	RC20[illegible]474K	81349	RESISTOR,FIXED,COMPOSITION	EA	3
20	2	XDFZZ		CC20CH070F	81349	CAPACITOR,FIXED,CERAMIC	EA	1
20	3	PAFZZ	5935-00-260-0516	TS102P01	81350	SOCKET,ELECTRON TUBE	EA	5
20	4	PAFZZ	5910-00-899-4395	CP09A1KB104K3	56289	CAPACITOR,FIXED,PAPER	EA	8
20	5	PAFZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
20	6	PAFZZ	5905-00-114-5393	RCR20G224JS	81349	RESISTOR,FIXED,COMPOSITION	EA	3
20	7	PAFZZ	5905-00-114-5398	RCR20G225JS	81349	RESISTOR,FIXED,COMPOSITION	EA	3
20	8	PAFZZ	5910-00-669-3636	196P1030154	56289	CAPACITOR,FIXED,PAPER	EA	9
20	9	PAFZZ	5905-00-106-1282	RCR20G223JS	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	10	PAFZZ	5905-00-295-3410	RC20GF473K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	11	PAFZZ	5910-00-984-8373	CM15FD101GP3	81349	CAPACITOR,FIXED,MICA	EA	3
20	12	PAFZZ	5905-00-192-3987	RC20GF1C4K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	13	PAFZZ	5905-00-279-1866	RC20GF106K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	14	PAFZZ	5910-00-833-4408	CP12A1KF103K3	56289	CAPACITOR,FIXED,PAPER	EA	1
20	15	PAFZZ	5905-00-247-8682	RCR20G825JS	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	16	PAFZZ	5[illegible]0-100-4745	RW30G121	81349	RESISTOR,FIXED,WIRE WOUND	EA	1
20	17	XDFZZ		29F496	08806	CAPACITOR,FIXED,ELECTROLYTIC	EA	2
20	18	PAFZZ	5910-00-686-6877	CM15D471G	81349	CAPACITOR,FIXED,MICA	EA	2
20	19	PAFZZ	5905-00-409-7616	RC20GF103K	81349	RESISTOR,FIXED,COMPOSITION	EA	5
20	20	PAFZZ	5[illegible]35-00-063-5789	TS101P01	81350	SOCKET,ELECTRON TUBE	EA	1
20	21	PAFZZ	5910-00-901-8949	CM15ED300G03	81349	CAPACITOR,FIXED,MICA	EA	1
20	22	PAFZZ	5935-00-812-4936	TS103P01	81350	SOCKET,ELECTRON TUBE	EA	3
20	23	PAFZZ	5905-00-195-6451	RC20GF472K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	24	PAFZZ	5950-00-387-0489	C0047109	95265	COIL,RADIO FREQUENCY	EA	3
20	25	PAFZZ	5910-00-667-5565	605	72136	CAPACITOR,FIXED,MICA	EA	1
20	26	PAFZZ	5905-00-104-8335	RC20GF124K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	27	XDFZZ		SMB283234	80063	CAPACITOR,VARIABLE,CERAMIC	EA	1
20	28	PAFZZ	5910-00-543-9577	196P4730154	56289	CAPACITOR,FIXED,PAPER	EA	1
20	29	PAFZZ	5905-00-110-0196	RCR20G102JS	81349	RESISTOR,FIXED,COMPOSITION	EA	2
20	30	PAFZZ	5905-00-171-2005	RC20GF471K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	31	PAFZZ	5905-00-104-8345	RC20GF560K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	32	PAFZZ	5905-00-279-1754	RC20GF155J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	33	PAFZZ	5905-00-156-0435	RCR42G390JS	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	34	PAFZZ	5905-00-247-8732	RCR32G471JS	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	35	PAFZZ	5905-00-279-2672	RC20GF182K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	36	PAFZZ	5905-00-245-0023	RC20GF682K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
20	37	PAFZZ	5945-00-259-6446	SMC143770	80063	RELAY,ARMATURE	EA	1
20	38	XDFZZ		SMB144586	80063	TERMINAL BOARD	EA	1
20	39	XDDZZ		MS35216-13	96906	SCREW,MACHINE	EA	2
20	40	PAFZZ	5905-00-993-2380	CM15CD120-J03	72136	CAPACITOR,FIXED,MICA	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
20	41	PADZZ	5940-00-645-5764	103A2	92825	TERMINAL,STUD	EA	3
20	42	XDDZZ		MS35200-11	96906	SCREW,MACHINE	EA	2
20	43	XDFZZ		SMB144566	80063	RETAINER,CAPACITOR	EA	2
20	44	PADZZ	9930-00-284-7980	SMD144561-17	80063	WASHER,NONMETALLIC	EA	4
20	45	XDBZZ		104-15-8L	96906	WASHER	EA	1
20	46	XDBZZ		8-32NC283-32	77250	NUT,PLAIN,HEXAGON	EA	2
20	47	XDDZZ		MS35200-48	96906	SCREW,MACHINE	EA	1
20	48	XDDZZ		MS35216-11	96906	SCREW,MACHINE	EA	3
20	49	PADZZ	5305-00-059-8451	MS35216-16	96906	SCREW	EA	2
20	50	XDDZZ		MS35200-27	96906	SCREW,MACHINE	EA	2
20	51	XBDZZ		SMB144569	80063	SPACER,SLEEVE	EA	2
20	52	XDDZZ		SMD144561-22	80063	WASHER,FLAT	EA	2
20	53	XDDZZ		SMB143506	80063	TERMINAL,LUG	EA	1
20	54	PADZZ	5820-00-537-4822	SMB144570	80063	SPACER,SLEEVE	EA	1
20	55	XDFZZ		SMB144576	80063	TERMINAL BOARD	EA	1
20	56	XDFZZ		SMB144582	80063	TERMINAL BOARD	EA	1
20	57	XDDZZ		4-40NC281-4	77250	NUT,PLAIN,HEXAGON	EA	19
20	58	XDDZZ		MS35216-12	96906	SCREW,MACHINE	EA	14
20	59	PADZZ	9310-00-543-4652	1702-00	78189	WASHER,LOCK	EA	21
20	60	XDDZZ		SMB249256	80063	TERMINAL,LUG	EA	5
20	61	PADZZ	5940-00-258-5327	103A1	92825	TERMINAL,STUD	EA	4
20	62	XDDZZ		104-33-3A	80063	WASHER,LOCK	EA	0
20	63	XDDZZ		SMD144561-21	80063	SCREW,MACHINE	EA	0
20	64	XDDZZ		MS35216-23	96906	SCREW,MACHINE	EA	0
20	65	XDFZZ		SMB144579	80063	TERMINAL BOARD	EA	1
20	66	XDDZZ		6-32NC283-32	83385	NUT,PLAIN,HEXAGON	EA	2
20	67	XDDZZ		SMB249257	80063	TERMINAL	EA	3
20	68	XDDZZ		MS35200-10	96906	SCREW,MACHINE	EA	4
20	69	XDDZZ		SMD144561-20	80063	NUT	EA	1
20	70	XDDZZ		1220-02	78189	WASHER,LOCK	EA	1
20	71	XDDZZ		SMB144564	80063	SPACER,SLEEVE	EA	1

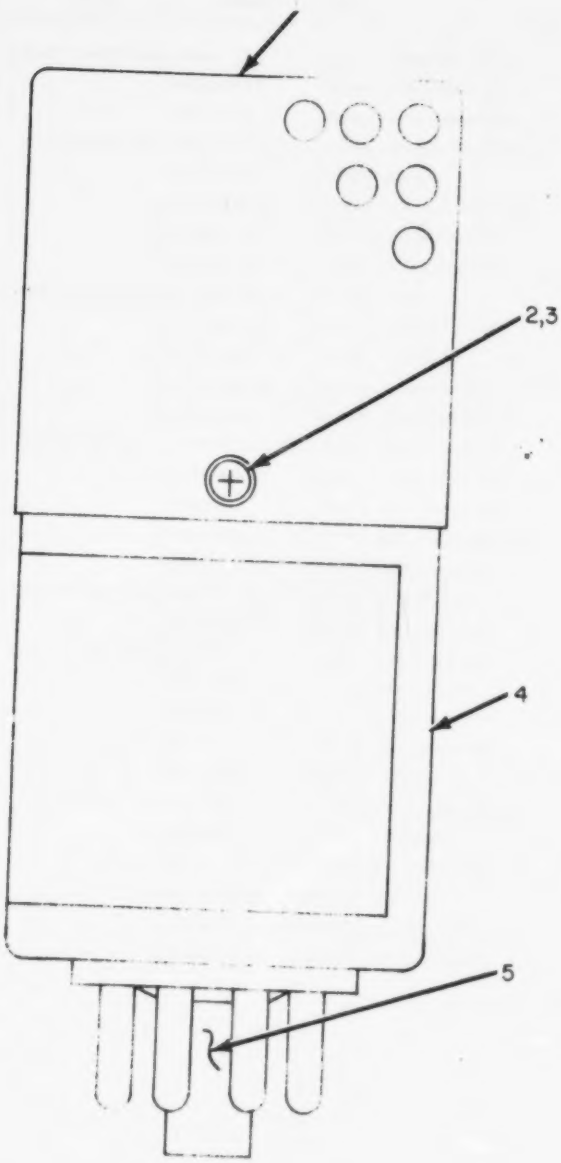

FRONT VIEW

ELOIF021

Figure 21. Amplifier, Audio Frequency, Audio Module Assembly (Sheet 1 of 3).

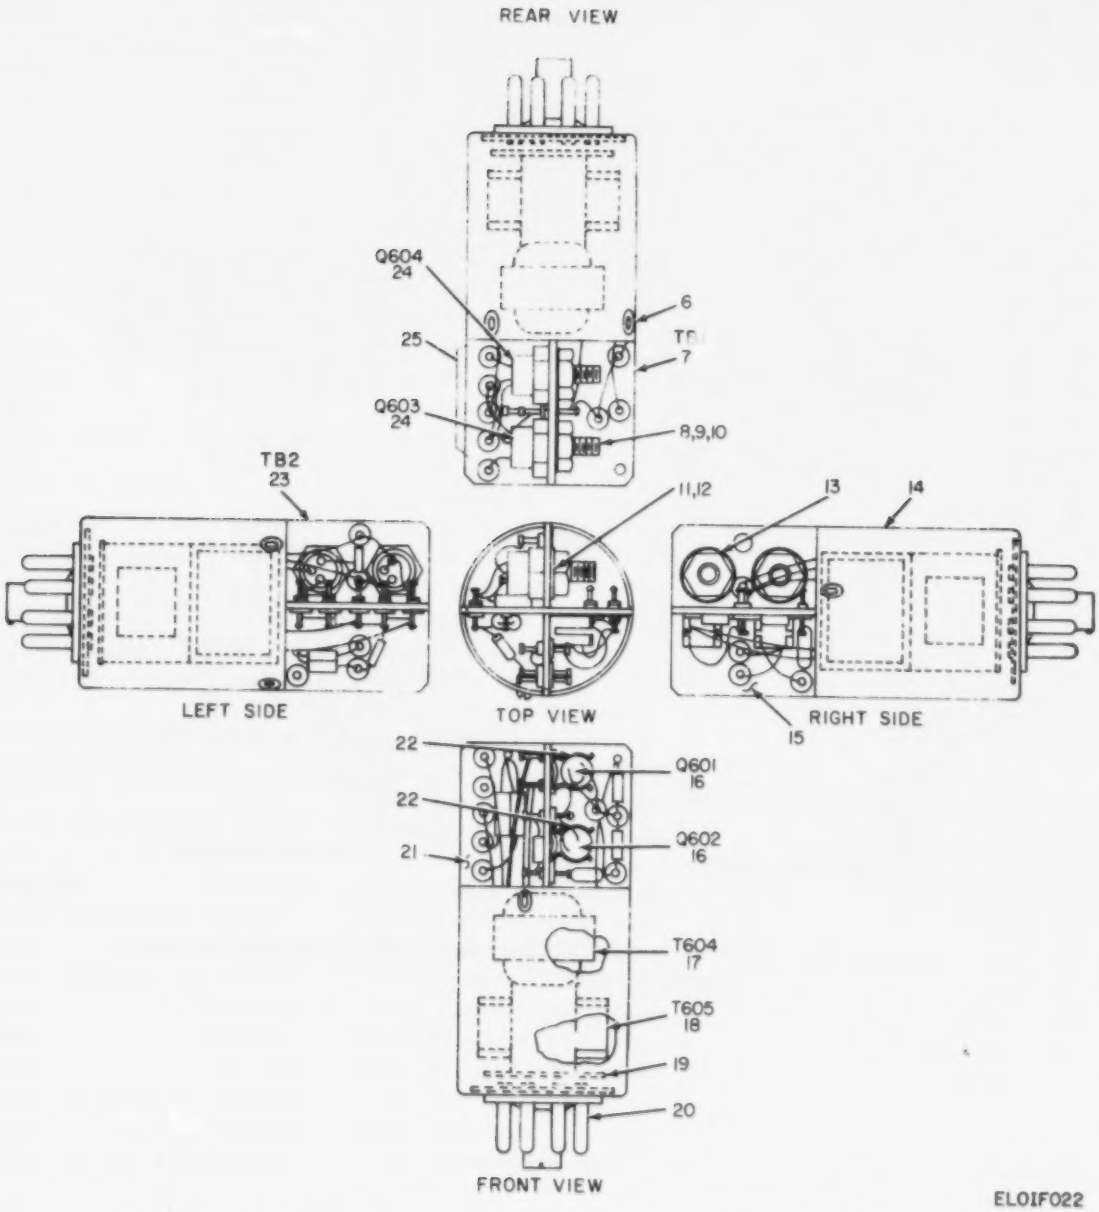

Figure 21. Amplifier, Audio Frequency, Audio Module Assembly (Sheet 2 of 3).

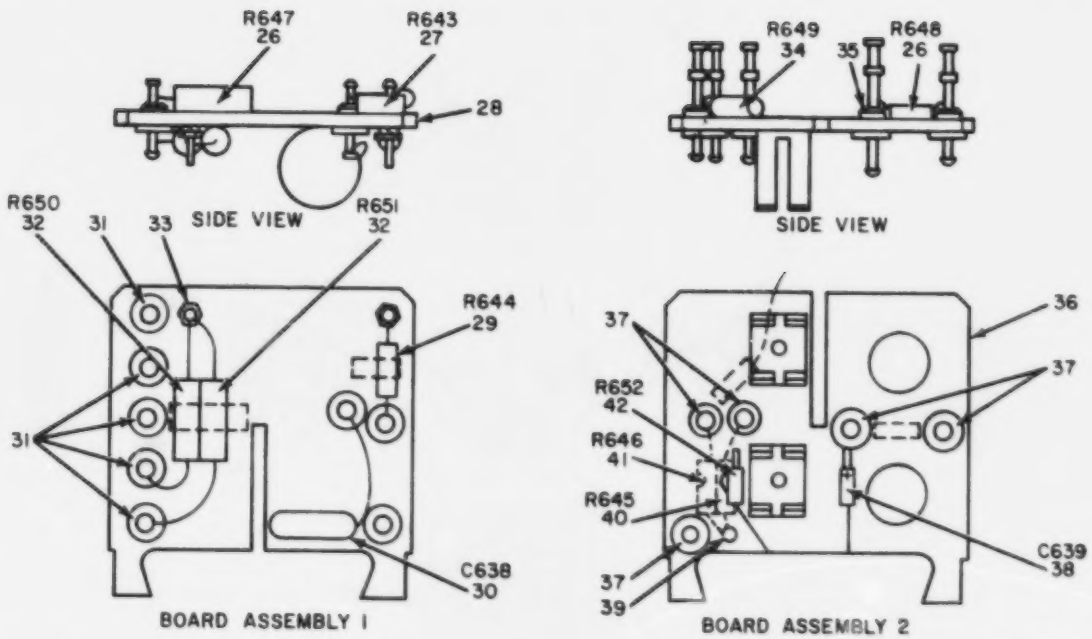

Figure 21. Amplifier, Audio Frequency, Audio Module Assembly (Sheet 3 of 3).

(1) ILLUSTRATION (a) FIG NO	(1) ILLUSTRATION (b) ITEM NO	(2) SMP CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
21	1	XDFZZ		SMB356721	80063	COVER,AUDIO MODULE	EA	1
21	2	XDFZZ		MS35216-12	96906	SCREW,MACHINE	EA	6
21	3	PAFZZ	5310-00-058-3599	MS35335-57	96906	WASHER,LOCK	EA	3
21	4	XDDZZ		SMD357513	80063	AUDIO MODULE SUBASSEMBLY	EA	1
21	5	XDDZZ		SMB356726	80063	PLUG ASSEMBLY	EA	1
21	6	XDDZZ		SMD357513-1	80063	INSERT,SCREW,THREADED	EA	3
21	7	XDFZZ		SMB356729	80063	TERMINAL BOARD ASSEMBLY	EA	1
21	8	PADZZ	5310-00-209-1239	MS35335-60	96906	WASHER,LOCK	EA	2
21	9	PADZZ	5310-00-619-1148	MS19795-308	96906	WASHER,FLAT	EA	2
21	10	PADZZ	5310-00-270-8810	MS35650-104	96906	NUT,PLAIN,HEXAGON	EA	2
21	11	XDDZZ		SMB340312	80063	WASHER	EA	2
21	12	XDDZZ		SMC357233-4	80063	SPACER,SLEEVE	EA	2
21	13	XDDZZ		SMC357233-3	80063	INSULATOR,WASHER	EA	4
21	14	XDDZZ		SMB356224	80063	ADAPTER	EA	1
21	15	XDFZZ		SMC357217	80063	TERMINAL BOARD	EA	1
21	16	PAFZZ	5961-00-577-6131	2N336	80131	TRANSISTOR	EA	2
21	17	XDFZZ		SMC357256	80063	TRANSFORMER	EA	1
21	18	XDFZZ		SMC357257	80063	TRANSFORMER	EA	1
21	19	XDDZZ		SMB356754	80063	INSULATION,DISK	EA	1
21	20	XDFZZ		SMB356722	80063	PLUG,OCTAL	EA	1
21	21	XDFZZ		SMB356755	80063	TERMINAL BOARD	EA	1
21	22	XDFZZ		SMB356733-1	80063	CLIP,SPRING TENSION	EA	2
21	23	XDFZZ		SMB356730	80063	TERMINAL BOARD ASSEMBLY	EA	1
21	24	PAFZZ	5961-00-724-6904	2N498A	80131	TRANSISTOR	EA	2
21	25	XDFZZ		SMC357231	80063	TERMINAL BOARD ASSEMBLY	EA	1
21	26	PAFZZ	5905-00-686-5997	RC07GF682J	81349	RESISTOR,FIXED,COMPOSITION	EA	2
21	27	PAFZZ	5905-00-681-8823	RC07GF684J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
21	28	XDFZZ		SMB356732	80063	TERMINAL BOARD SUBASSEMBLY	EA	1
21	29	PAFZZ	5905-00-686-3356	RC07GF823J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
21	30	XDFZZ		SMB356729-1	80063	CAPACITOR,FIXED,CERAMIC	EA	1
21	31	XDDZZ		SMB356732-2	80063	TERMINAL,FEEDTHRU,INSULATOR	EA	5
21	32	PAFZZ	5905-00-081-6137	RW59V5R1	81349	RESISTOR,FIXED,WIRE WOUND	EA	2
21	33	XDDZZ		SMB356733-2	80063	TERMINAL,STUD	EA	3
21	34	PAFZZ	5905-00-683-2246	RC07GF473J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
21	35	XDDZZ		SMB356733-4	80063	TERMINAL,FEEDTHRU,INSULATOR	EA	1
21	36	XDFZZ		SMB356733	80063	TERMINAL BOARD SUBASSEMBLY	EA	1
21	37	XDDZZ		SMB356732-3	80063	TERMINAL,FEEDTHRU,INSULATOR	EA	5
21	38	PAFZZ	5910-00-495-0042	CSR13G105KS	81349	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
21	39	XDDZZ		SMB356733-3	80063	TERMINAL,STUD	EA	3
21	40	PAFZZ	5905-00-691-8145	RC07GF562J	81349	RESISTOR,FIXED,COMPOSITION	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
21	41	PAFZZ	5905-00-686-9996	RC07GF821J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
21	42	PAFZZ	5905-00-726-3807	RC07GF912J	81349	RESISTOR,FIXED,COMPOSITION	EA	1

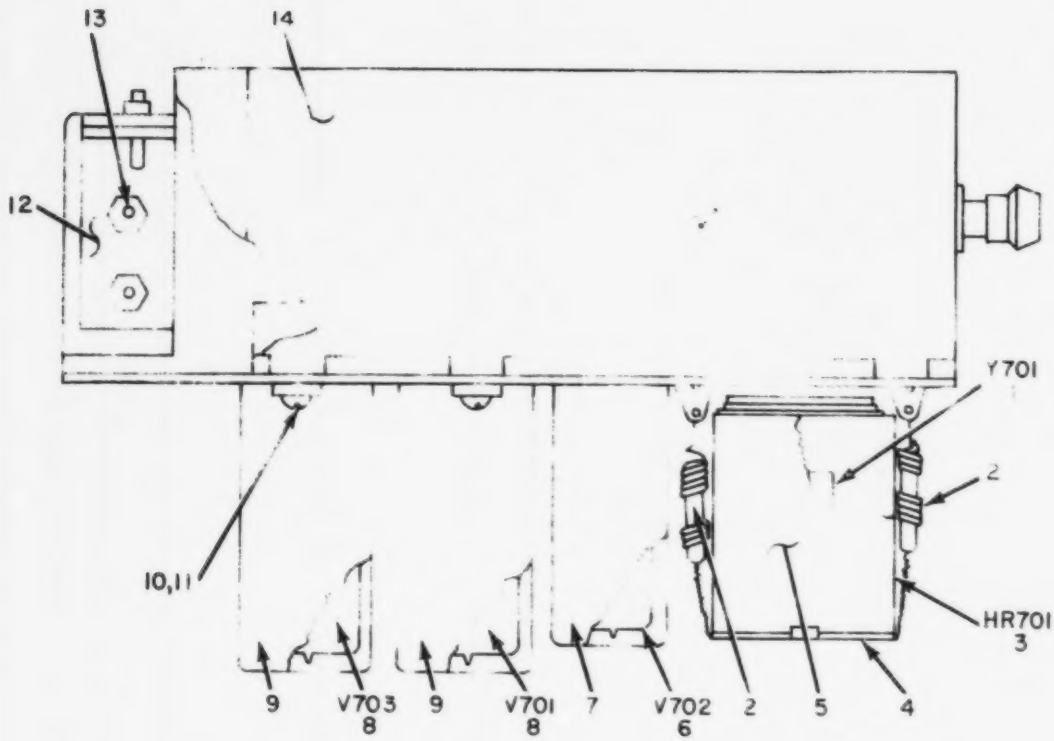

ELOIF024

Figure 22. Calibrator, Crystal

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0106 CALIBRATOR,CRYSTAL		
22	1	PAFZZ	5955-00-951-9143	RC47U	81349	CRYSTAL UNIT,QUARTZ	EA	1
22	2	PAFZZ	5360-CC-777-6817	SMD144595	80063	SPRING,HELICAL,EXTENSION	EA	2
22	3	PAFZZ	5955-00-667-4564	TGO-1C	71034	OVEN,CRYSTAL	EA	1
22	4	XDDZZ		SMC178506	80063	BRACKET,ANGLE	EA	1
22	5	XDDZZ		SMB144540	80063	OVEN ASSEMBLY	EA	1
22	6	PADZZ	5960-00-188-0827	26A6	81349	ELECTRON TUBE	EA	1
22	7	PADZZ	5960-00-860-7709	M24251-6-2	81349	SHIELD,ELECTRON TUBE	EA	1
22	8	PADZZ	5960-00-166-7663	12AU7	81349	ELECTRON TUBE	EA	2
22	9	PADZZ	5960-00-860-7710	M24251-6-5	81349	SHIELD,ELECTRON TUBE	EA	2
22	10	PADZZ	5310-00-209-1368	MS35335-98	96906	WASHER	EA	3
22	11	XDDZZ		MS35216-23	96906	SCREW	EA	3
22	12	XDDZZ		SMB144596	80063	BRACKET,ANGLE	EA	1
22	13	XDDZZ		MS35200-23	96906	SCREW,MACHINE	EA	2
22	14	XDDZZ		SMC144600	80063	CHASSIS	EA	1

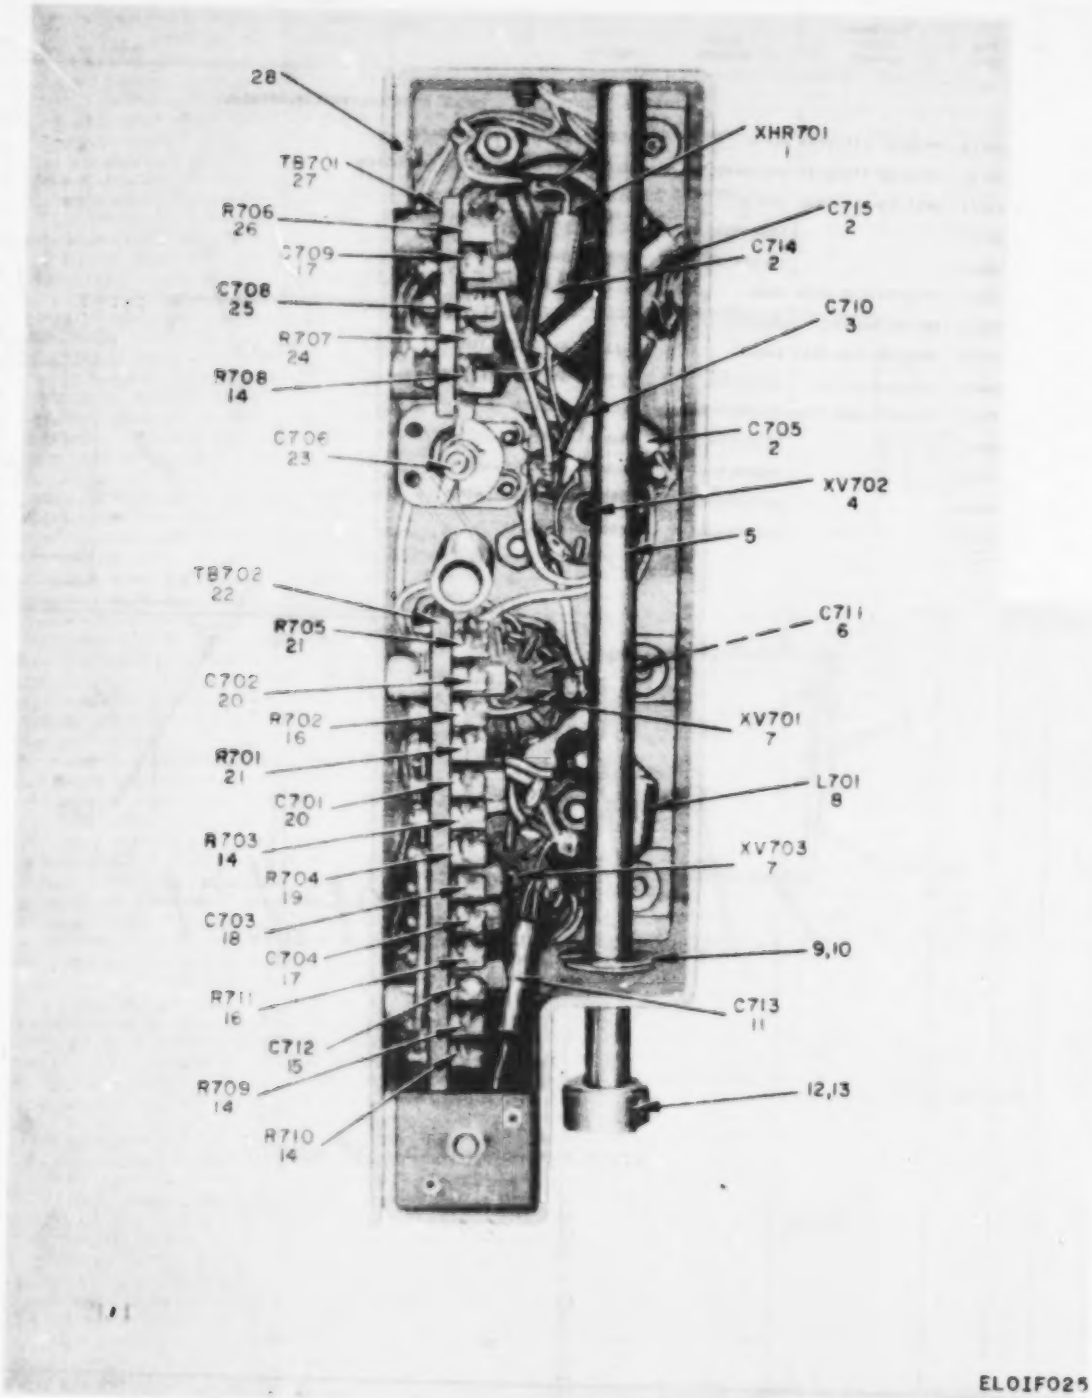

Figure 23. Calibrator, Crystal, Bottom View.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
23	1	PAFZZ	5935-00-063-5789	TS101P01	81350	SOCKET,ELECTRON TUBE	EA	1
23	2	PAFZZ	5910-00-821-4702	CP05A3KE103K3	81349	CAPACITOR,FIXED,PAPER	EA	3
23	3	PAFZZ	5910-00-669-3636	196P1030154	56289	CAPACITOR,FIXED,PAPER	EA	1
23	4	PAFZZ	5935-00-260-0516	TS102P01	81350	SOCKET,ELECTRON TUBE	EA	1
23	5	XDDZZ		SMB144529	80063	SHAFT ASSEMBLY	EA	1
23	6	PAFZZ	5910-00-850-0540	CM15E510G	72136	CAPACITOR,FIXED,MICA	EA	1
23	7	PAFZZ	5935-00-812-4936	TS103P01	81350	SOCKET,ELECTRON TUBE	EA	2
23	8	PAFZZ	5950-00-387-0489	C0047109	95265	COIL,RADIO FREQUENCY	EA	1
23	9	XDDZZ		SMB144527-2	80063	RING	EA	1
23	10	PADZZ	5305-00-805-9748	MS51053-112	96906	SCREW,SOCKET HEAD	EA	2
23	11	XDFZZ		SMD144592-20	80063	CAPACITOR,FIXED,CERAMIC	EA	1
23	12	XDDZZ		SMB144527-1	80063	RING	EA	1
23	13	XDDZZ		SMB283169	80063	SCREW	EA	2
23	14	PAFZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR,FIXED,COMPOSITION	EA	4
23	15	PAFZZ	5910-00-060-9619	CM15FD511G03	72136	CAPACITOR,FIXED,MICA	EA	1
23	16	PAFZZ	5905-00-192-3987	RC20GF104K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
23	17	PAFZZ	5910-00-984-8373	CM15FD101GP3	81349	CAPACITOR,FIXED,MICA	EA	2
23	18	PAFZZ	5910-00-270-4853	CM15E820G	72136	CAPACITOR,FIXED,MICA	EA	1
23	19	PAFZZ	5905-00-195-6451	RC20GF472K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
23	20	PAFZZ	5910-00-667-5565	605	72136	CAPACITOR,FIXED,MICA	EA	2
23	21	PAFZZ	5905-00-106-1282	RCR20G223J5	81349	RESISTOR,FIXED,COMPOSITION	EA	2
23	22	XDFZZ		SMB144611	80063	TERMINAL BOARD	EA	1
23	23	PAFZZ	5910-00-649-3022	160-110-4	74970	CAPACITOR,VARIABLE,AIR	EA	1
23	24	PAFZZ	5905-00-295-3410	RC20GF473K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
23	25	PAFZZ	5910-00-299-2323	SMB144611-5	80063	CAPACITOR,FIXED,CERAMIC	EA	1
23	26	PAFZZ	5905-00-409-7616	RC20GF105K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
23	27	XDFZZ		SMC144607	80063	TERMINAL BOARD	EA	1
23	28	XDDZZ		MS35200-12	96906	SCREW,MACHINE	EA	2

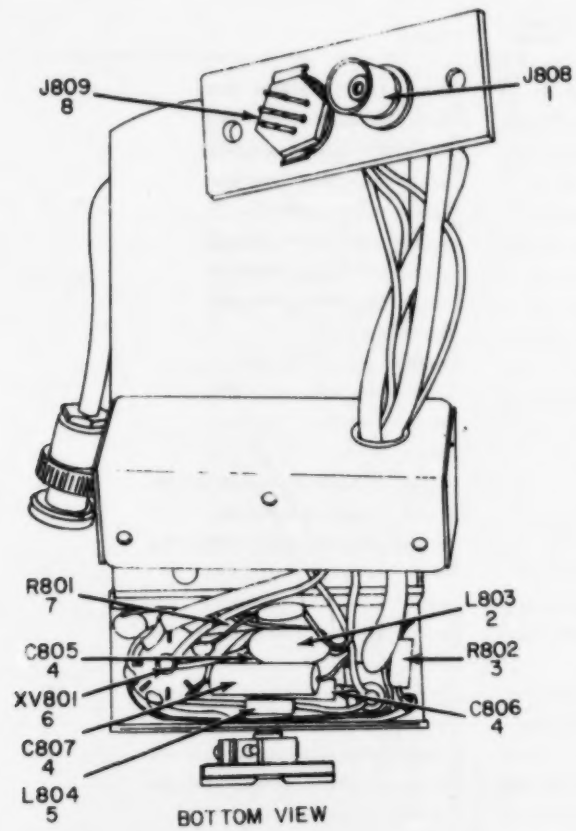

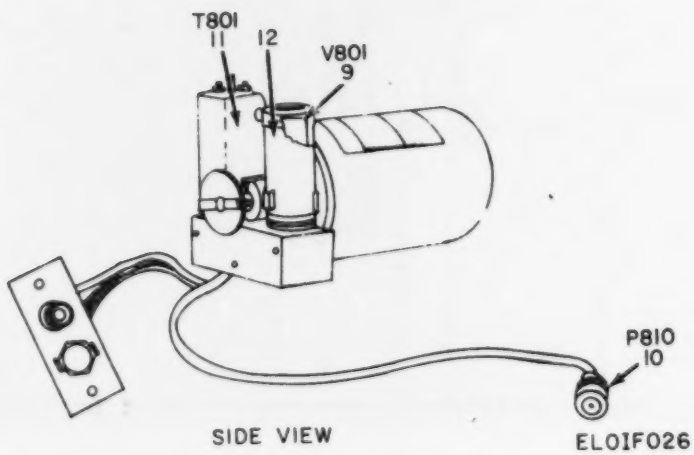

Figure 24. Oscillator, Radio Frequency, Variable Frequency, Bottom and Side Views.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0107 OSCILLATOR,RADIO FREQUENCY, VARIABLE FREQUENCY		
24	1	PAFZZ	5935-00-244-5728	SC841673	80063	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
24	2	PAFZZ	5950-00-387-0489	C0047109	95265	COIL,RADIO FREQUENCY	EA	1
24	3	PAFZZ	5905-00-195-5514	RC20GF152K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
24	4	PAFZZ	5910-00-821-4702	CP05A1KE103K3	56289	CAPACITOR,FIXED,PAPER	EA	3
24	5	PAFZZ	5950-00-683-7344	10107-3	82142	COIL,RADIO FREQUENCY	EA	8
24	6	PAFZZ	5935-00-260-0516	TS102P01	81350	SOCKET,ELECTRON TUBE	EA	8
24	7	PAFZZ	5905-00-114-5489	RCR20G823JS	81349	RESISTOR,FIXED,COMPOSITION	EA	8
24	8	PAFZZ	5935-00-636-5913	26-191	02660	INSERT,CONNECTOR,ELECTRICAL	EA	8
24	9	PADZZ	5960-00-188-0987	2606	81349	ELECTRON TUBE	EA	8
24	10	PAFZZ	5935-00-259-0820	31-119	02660	CONNECTOR,PLUG,ELECTRICAL	EA	8
24	11	PAFZZ	5950-00-647-8096	SMD249235	80063	TRANSFORMER,INTERMEDIATE FREQUENCY	EA	1
24	12	PADZZ	5960-00-860-7709	M24251-6-2	81349	SHIELD,ELECTRON TUBE	EA	1

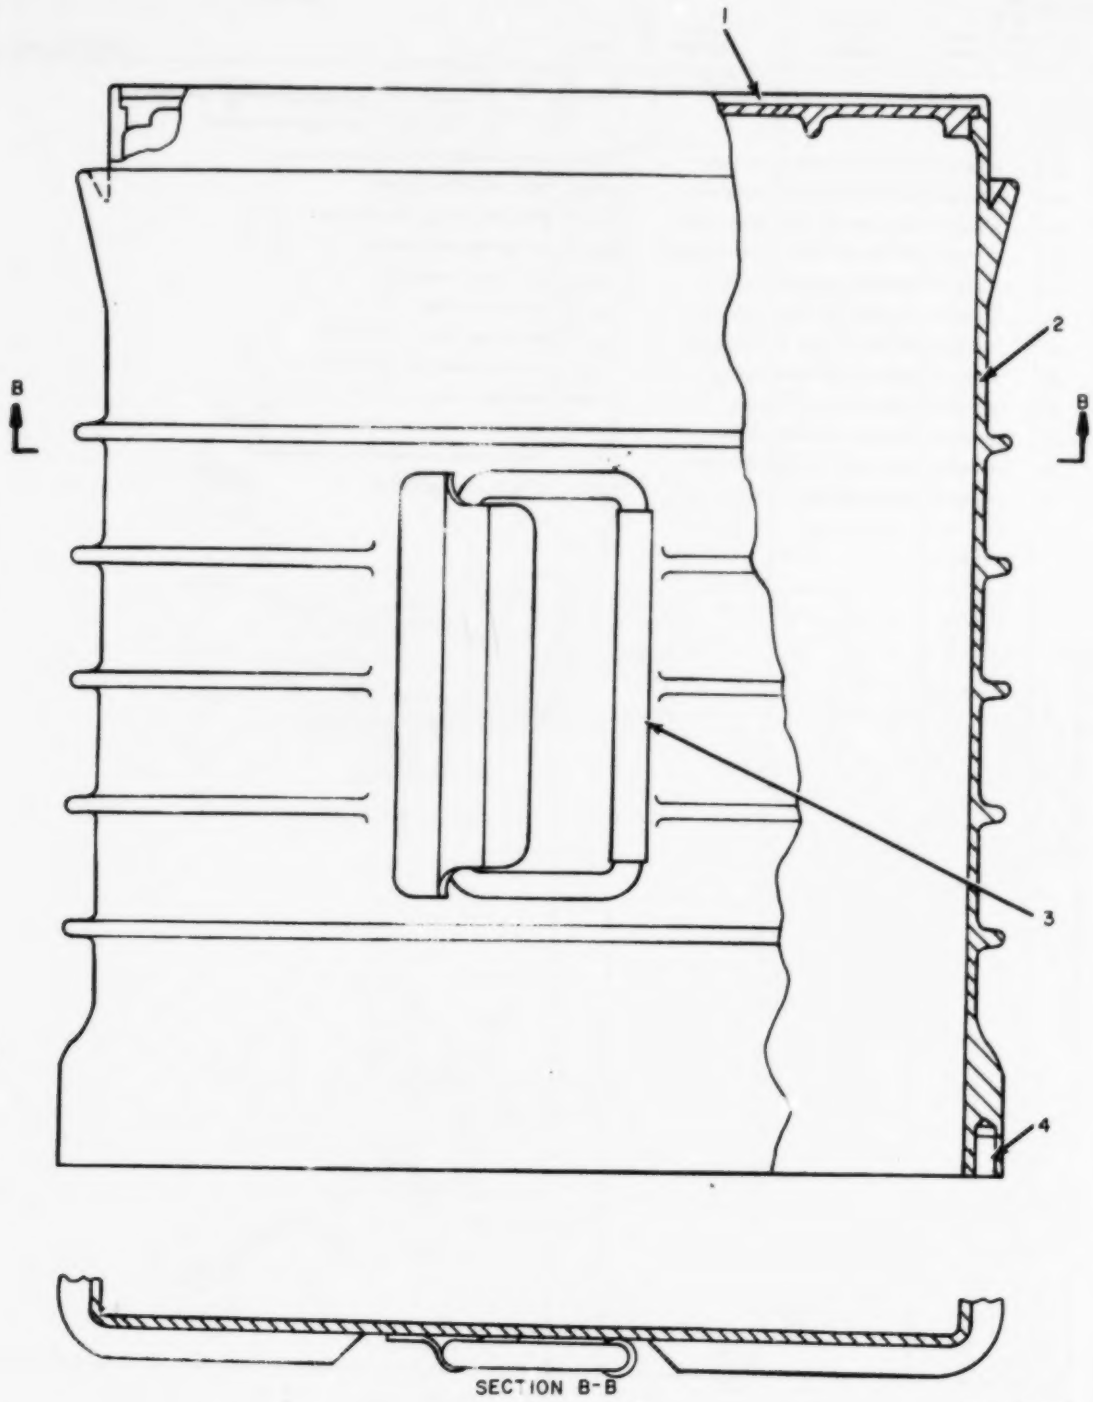

Figure 25. Case Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 02 CASE ASSEMBLY		
25	1	XDDZZ		SMD357519	80063	EXTRUSION,BOTTOM	EA	V
25	2	XDDZZ		SMD357518	80063	EXTRUSION,SIDE	EA	V
25	3	XDDZZ		SMD357515-2	80063	HANDLE ASSEMBLY	EA	2
25	4	XDDZZ		SMD357515-1	80063	INSERT,SCREW,THREADED	EA	5

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

STOCK NUMBER	FIGURE NO.	ITEM NO.
5310-00-058-3599	21	3
5305-00-059-8451	20	49
5305-00-059-8460	9	41
5910-00-063-0695	12	18
5935-00-063-5789	20	20
5935-00-063-5789	23	1
5820-00-092-1018	2	2
5905-00-100-4745	20	16
5960-00-100-7111	19	8
6240-00-155-8714	11	2
5960-00-166-7663	19	1
5960-00-166-7663	22	8
5905-00-171-2005	20	30
5905-00-185-6946	20	1
5905-00-185-8518	20	5
5905-00-185-8518	23	14
5955-00-187-1914	13	8
5960-00-188-0827	17	3
5960-00-188-0827	19	5
5960-00-188-0827	22	6
5960-00-188-0897	6	43
5960-00-188-0987	24	9
5960-00-188-3553	12	2
5960-00-188-3553	19	11
5905-00-192-3987	8	9
5905-00-192-3987	12	13
5905-00-192-3987	18	9
5905-00-192-3987	20	12
5905-00-192-3987	23	16
5905-00-195-5514	24	3
5905-00-195-6451	20	23
5905-00-195-6451	23	19
5905-00-195-6502	5	14
5905-00-195-6502	8	10
5935-00-201-3511	17	8
5935-00-201-3511	19	10
5310-00-209-1239	21	8
5310-00-209-1366	22	10
5340-00-209-7692	4	25
5910-00-227-0793	12	26
5910-00-241-0449	12	32
5935-00-244-5728	5	5
5935-00-244-5728	8	7
5935-00-244-5728	24	1
5905-00-245-0023	20	36
5955-00-248-0686	13	3
5910-00-257-0662	4	13
5910-00-257-0662	5	15
5940-00-258-5327	20	61
5945-00-258-9852	19	16
5935-00-259-0820	4	20
5935-00-259-0820	24	10
5945-00-259-6446	4	4
5945-00-259-6446	20	37
5935-00-260-0516	8	12
5935-00-260-0516	12	12
5935-00-260-0516	18	4
5935-00-260-0516	20	3
5935-00-260-0516	23	4
5935-00-260-0516	24	6
5330-00-260-9311	3	14
5910-00-264-9420	12	17
5910-00-264-9420	12	31
5910-00-264-9427	8	4
5910-00-270-4853	12	11
5910-00-270-4853	23	18
5310-00-270-8810	21	10
5905-00-279-1866	20	13
5905-00-279-2672	20	35
5920-00-280-8344	4	19
5910-00-280-8381	8	11
5910-00-280-8381	12	7
5365-00-282-0782	10	18
5940-00-283-5386	3	27
5920-00-284-6787	4	17
5970-00-284-7900	20	44
5365-00-285-6688	19	25
5905-00-295-3410	8	21
5905-00-295-3410	20	10
5905-00-295-3410	23	24
5950-00-295-7823	4	10
5910-00-299-2323	23	25
5930-00-301-4573	4	39
5365-00-322-4148	[illegible]	21
5820-00-322-4672	2	7
5950-00-387-0489	8	17
5950-00-387-0489	12	14
5950-00-387-0489	16	7
5950-00-387-0489	20	24
5950-00-387-0489	23	8
5950-00-387-0489	24	2
5950-00-392-6557	6	18
5950-00-392-6558	6	19
5950-00-392-6559	6	25
5950-00-392-6560	6	2
5950-00-392-6561	6	1
5950-00-392-6562	6	42
5950-00-392-6563	6	6
5950-00-392-6564	6	20
5950-00-392-6565	6	21
5950-00-392-6569	6	32
5905-00-409-7616	20	19
5905-00-409-7616	23	26
5820-00-448-6763	19	8
5820-00-463-3963	11	3
5935-00-501-5487	19	14
5935-00-501-5488	19	6
5820-00-503-0921	2	4
5820-00-503-1138	2	6
5820-00-503-1649	1	1
5820-00-503-2533	2	1
5930-00-503-4704	18	13
5950-00-521-6756	12	1
5820-00-537-4822	19	22
5820-00-537-4822	20	54
6625-00-538-9700	4	40
5905-00-539-3234	18	45
5940-00-542-9890	10	7
5310-00-543-4652	9	33
5310-00-543-4652	20	59
5910-00-543-9577	20	28
5820-00-545-7202	2	3
5330-00-545-7491	4	34
5930-00-546-6287	4	7
5820-00-547-3672	6	27
5820-00-547-3673	6	44
5930-00-548-6942	9	21
5930-00-548-9455	18	11
5935-00-549-1699	7	8
5935-00-549-1699	8	14
5935-00-549-1699	12	4
5935-00-549-2646	4	9
5310-00-550-3715	7	11
5905-00-556-5228	18	16
5950-00-568-4844	19	7
5820-00-571-1836	6	28
5820-00-571-1837	6	29
5820-00-571-1838	6	4
5820-00-571-1839	6	3
5820-00-571-2556	6	26
5961-00-577-6131	21	16
5310-00-596-7693	10	2
5865-00-598-1300	10	12
5310-00-616-3554	15	4
5310-00-616-3554	17	5
5310-00-619-1148	21	9
5930-00-636-4625	12	15
5935-00-636-5913	12	5
5935-00-636-5913	24	8
5910-00-643-9141	5	13

STOCK NUMBER	FIGURE NO.	ITEM NO.
5930-00-644-0229	9	10
5930-00-644-2929	4	23
5950-00-645-4583	6	22
5950-00-645-4584	6	37
5950-00-645-4660	12	6
5950-00-647-8096	24	11
5950-00-648-1977	17	2
5950-00-648-2370	17	4
5950-00-648-2385	19	3
5910-00-649-3022	23	23
5935-00-660-5590	19	12
5950-00-660-7667	6	38
5940-00-665-5764	18	21
5940-00-665-5764	20	41
5910-00-666-7825	4	33
5910-00-666-8877	18	6
5910-00-666-8877	20	18
5955-00-667-2409	13	13
5955-00-667-2436	13	17
5955-00-667-4564	22	3
5910-00-667-5565	20	25
5910-00-667-5565	23	20
5355-00-667-9002	3	5
5910-00-668-7937	12	29
5910-00-669-3636	8	6
5910-00-669-3636	18	3
5910-00-669-3636	20	8
5910-00-669-3636	23	3
5905-00-681-8823	21	27
5905-00-683-2246	21	34
5950-00-683-7344	8	13
5950-00-683-7344	24	5
5905-00-686-3356	21	29
5905-00-686-9996	21	41
5905-00-686-9997	21	26
5905-00-691-0195	21	40
5365-00-697-1728	5	4
5365-00-697-1728	6	16
5930-00-697-3379	9	20
5955-00-709-5335	13	9
5961-00-724-6904	21	24
5905-00-726-3807	21	42
5955-00-734-4826	13	12
5310-00-734-5661	9	5
6680-00-752-7855	11	9
5930-00-755-5416	4	1
3020-00-777-1417	18	30
5960-00-777-3235	6	40
5360-00-777-6817	22	2
5955-00-786-1497	13	15
5935-00-788-8486	7	18
5305-00-805-9748	23	10
5905-00-806-3622	4	29
5905-00-806-3623	4	30
5905-00-806-3627	18	1
5905-00-806-3628	18	18
5930-00-806-6113	18	35
3020-00-810-9463	5	7
5935-00-812-4936	20	22
5935-00-812-4936	23	7
5950-00-812-6106	19	13
5910-00-842-2292	8	20
5955-00-842-3947	13	18
5310-00-934-9747	9	31
5310-00-934-9747	19	26
5310-00-950-1310	17	15
5955-00-951-9143	22	1

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
AN500C4-10	88044	18	43
AN500C4-8	88044	18	47
AN565D6L2	88044	18	37
AN622785	88044	3	14
ASP222	80130	4	40
AX75818-1	79142	11	9
CC20CH070F	81349	20	2
CC20CJ030D	81349	8	3
CC20CK020D	81349	8	20
CM15B100J	72136	12	29
CM15C200J	72136	12	31
CM15D120J	72136	12	30
CM15D240J	72136	12	32
CM15D270J	72136	12	21
CM15D430J	72136	12	24
CM15D471G	81349	18	6
CM15D471G	81349	20	18
CM15D681G	72136	12	28
CM15D820J	81349	12	23
CM15E101J	72136	12	26
CM15E151G	72136	12	25
CM15E300J	72136	8	4
CM15E510G	72136	23	6
CM15E620J	72136	12	27
CM15E680G	72136	12	18
CM15E820G	72136	12	11
CM15E820G	72136	23	18
CR18AU11000KC	81349	13	7
CR18AU115000-0MHC	81349	13	11
CR18AU12500-00KC	81349	13	13
CR18AU13000-00KC	81349	13	9
CR18AU9500-000KC	81349	13	12
CR18AU9666-667KC	81349	13	15
CR18AY11333-333KC	81349	13	18
CR18U10333-333KC	81349	13	17
CR18U10500-00KC	81349	13	10
CR18U10666-67KC	81349	13	16
CR18U12600KC	81349	13	19
CR18U15000KC	81349	13	2
CR18U7000-000KC	81349	13	20
CR18U8C00KC	81349	13	1
CR18U8500-000KC	81349	13	8
CR18U9000KC	81349	13	3
CSR136105KS	81349	21	38
C0047109	95265	8	17
C0047109	95265	12	14
C0047109	95265	18	7
C0047109	95265	20	24
C0047109	95265	23	8
C0047109	95265	24	2
EB82426	00656	8	11
EB82426	00656	12	7
F02GR500A	81349	4	19
F04A5R00A	81349	4	17
MH9M	66099	7	18
MS15795-204	96906	17	15
MS15795-304	96906	15	9
MS15795-308	96906	21	9
MS35200-10	96906	20	68
MS35200-11	96906	17	12
MS35200-11	96906	20	42
MS35200-12	96906	18	58
MS35200-12	96906	23	28
MS35200-13	96906	9	34
MS35200-13	96906	17	10
MS35200-14	96906	17	9
MS35200-22	96906	18	24
MS35200-23	96906	7	28

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
MS35200-23	96906	22	13
MS35200-27	96906	20	50
MS35200-48	96906	20	47
MS35216-10	96906	4	5
MS35216-11	96906	7	13
MS35216-11	96906	13	23
MS35216-11	96906	18	22
MS35216-11	96906	20	48
MS35216-12	96906	7	1
MS35216-12	96906	15	3
MS35216-12	96906	17	14
MS35216-12	96906	20	58
MS35216-13	96906	21	2
MS35216-13	96906	5	11
MS35216-13	96906	18	46
MS35216-14	96906	20	39
MS35216-16	96906	7	6
MS35216-17	96906	20	49
MS35216-18	96906	3	2
MS35216-22	96906	7	26
MS35216-22	96906	3	10
MS35216-22	96906	9	11
MS35216-23	96906	15	1
MS35216-23	96906	4	36
MS35216-23	96906	9	29
MS35216-23	96906	18	31
MS35216-23	96906	20	64
MS35216-24	96906	22	11
MS35216-24	96906	3	15
MS35216-24	96906	9	16
MS35216-25	96906	19	24
MS35216-40	96906	9	41
MS35216-41	96906	10	1
MS35333-70	96906	9	22
MS35335-15	96906	7	11
MS35335-16	96906	15	4
MS35335-2	96906	4	31
MS35335-2	96906	9	40
MS35335-29	96906	19	23
MS35335-3	96906	17	5
MS35335-57	96906	10	2
MS35335-58	96906	21	3
MS35335-60	96906	22	10
MS35337-2	96906	21	8
MS35337-2	96906	5	9
MS35337-78	96906	10	9
MS35338-21	96906	9	5
MS35338-21	96906	3	1
MS35338-22	96906	18	25
MS35338-78	96906	3	11
MS35338-78	96906	7	25
MS35649-44	96906	15	10
MS35649-44	96906	5	10
MS35650-104	96906	17	16
MS51017-33	96906	21	10
MS51053-112	96906	9	38
MT836URR	96906	23	10
NA15X2R70J	80058	1	12
QRE18SL	81349	18	10
RC07GF473J	81312	4	12
RC07GF562J	81349	21	34
RC07GF682J	81349	21	40
RC07GF684J	81349	21	26
RC07GF821J	81349	21	27
RC07GF823J	81349	21	41
RC07GF912J	81349	21	29
	81349	21	42
RC20GF103K	81349	20	5
RC20GF103K	81349	23	14
RC20GF104K	81349	8	9
RC20GF104K	81349	12	13
RC20GF104K	81349	18	9
RC20GF104K	81349	20	12
RC20GF105K	81349	23	16
RC20GF105K	81349	20	19
	81349	23	26

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RC20GF106K	81349	20	13
RC20GF124K	81349	20	26
RC20GF152K	81349	24	3
RC20GF155J	81349	8	1
RC20GF155J	81349	20	32
RC20GF182K	81349	20	35
RC20GF332K	81349	5	14
RC20GF332K	81349	8	10
RC20GF471K	81349	20	30
RC20GF472K	81349	20	23
RC20GF472K	81349	23	19
RC20GF473K	81349	8	21
RC20GF473K	81349	20	10
RC20GF473K	81349	23	24
RC20GF474K	81349	20	1
RC20GF560K	81349	20	31
RC20GF682K	81349	20	36
RC47U	81349	22	1
RN20X6811F	81349	18	15
RN70B1822F	81349	18	16
RW30G121	81349	20	16
RW59V5R1	81349	21	32
SCB16552	80063	3	3
SCB41673	80063	8	7
SCB41673	80063	24	1
SCC16495	80063	3	27
SMA144617	80063	4	23
SMA144618	80063	4	7
SMA146616	80063	4	1
SMB143282	80063	3	16
SMB143409	80063	18	54
SMB143506	80063	20	53
SMB144329	80063	3	28
SMB144332	80063	3	12
SMB144359	80063	4	14
SMB144361-2	80063	4	26
SMB144362	80063	4	27
SMB144451	80063	10	11
SMB144451	80063	18	29
SMB144517	80063	3	5
SMB144527	80063	18	52
SMB144527-1	80063	23	12
SMB144527-2	80063	5	18
SMB144527-2	80063	23	9
SMB144528-2	80063	10	20
SMB144529	80063	23	5
SMB144533	80063	18	35
SMB144536	80063	18	1
SMB144537	80063	18	51
SMB144540	80063	22	5
SMB144542	80063	18	30
SMB144548	80063	18	56
SMB144550	80063	18	48
SMB144553	80063	18	26
SMB144559	80063	18	57
SMB144563	80063	19	15
SMB144564	80063	20	71
SMB144566	80063	20	43
SMB144567	80063	19	19
SMB144568	80063	19	21
SMB144569	80063	20	51
SMB144570	80063	20	54
SMB144573	80063	19	20
SMB144576	80063	20	55
SMB144579	80063	20	65
SMB144582	80063	20	56

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMB144586	80063	20	38
SMB144596	80063	22	12
SMB144611	80063	23	22
SMB144611-5	80063	23	25
SMB144622-1	80063	4	30
SMB144622-2	80063	4	29
SMB144625	80063	4	24
SMB144626	80063	4	34
SMB144628	80063	3	20
SMB144629	80063	3	23
SMB144630	80063	4	38
SMB144631	80063	3	21
SMB144632	80063	3	13
SMB144634	80063	3	19
SMB144635	80063	3	17
SMB144638	80063	4	33
SMB144639	80063	4	2
SMB144660	80063	5	7
SMB144666	80063	4	28
SMB144672	80063	4	3
SMB144693	80063	6	11
SMB144694	80063	6	17
SMB144695	80063	9	23
SMB144696	80063	9	24
SMB144698	80063	6	15
SMB144700	80063	6	34
SMB144703	80063	10	3
SMB144704	80063	11	6
SMB144705	80063	10	5
SMB144708	80063	6	9
SMB144709	80063	10	19
SMB144713	80063	9	7
SMB144717	80063	15	7
SMB144718	80063	15	5
SMB144719	80063	15	6
SMB144720	80063	15	11
SMB144721	80063	16	3
SMB144726	80063	13	22
SMB144748	80063	14	2
SMB144762-1	80063	7	27
SMB144767	80063	15	8
SMB144780	80063	6	13
SMB144784	80063	9	13
SMB144791	80063	9	14
SMB144803	80063	6	10
SMB144842	80063	11	1
SMB144884	80063	9	21
SMB144885	80063	9	1
SMB144886	80063	9	20
SMB144890	80063	9	3
SMB144892	80063	9	19
SMB144893	80063	7	29
SMB144896	80063	7	23
SMB145035	80063	14	1
SMB178483-2	80063	9	28
SMB178486	80063	10	7
SMB178517	80063	18	11
SMB178518	80063	18	13
SMB178526	80063	17	11
SMB178526	80063	19	17
SMB178564	80063	19	22
SMB178749	80063	6	22
SMB178751	80063	6	37
SMB178759	80063	9	30
SMB178789	80063	9	10
SMB178830	80063	10	4
SMB178858	80063	2	5
SMB248829-3	80063	3	6
SMB248867	80063	10	14
SMB248869	80063	10	15
SMB248870	80063	10	13
SMB248873	80063	10	17
SMB249201	80063	9	39
SMB249226-1	80063	18	49
SMB249226-2	80063	9	42
SMB249226-2	80063	18	42
SMB249226-6	80063	9	25
SMB249250	80063	5	3
SMB249250	80063	9	4
SMB249256	80063	7	24
SMB249256	80063	18	23
SMB249256	80063	20	60
SMB249257	80063	4	6
SMB249257	80063	6	14
SMB249257	80063	20	67
SMB249265	80063	7	15
SMB283160	80063	10	16
SMB283161	80063	11	8
SMB283169	80063	18	36
SMB283169	80063	23	13
SMB283171-1	80063	10	18
SMB283173-1	80063	3	29
SMB283174-1	80063	5	4
SMB283174-1	80063	6	16
SMB283174-3	80063	10	12
SMB283200	80063	8	1
SMB283201	80063	7	21
SMB283234	80063	8	18
SMB283234	80063	20	27
SMB340312	80063	21	11
SMB356224	80063	21	14
SMB356721	80063	21	1
SMB356722	80063	21	20
SMB356726	80063	21	5
SMB356729	80063	21	7
SMB356729-1	80063	21	30
SMB356730	80063	21	23
SMB356732	80063	21	28
SMB356732-2	80063	21	31
SMB356732-3	80063	21	37
SMB356733	80063	21	36
SMB356733-1	80063	21	22
SMB356733-2	80063	21	33
SMB356733-3	80063	21	39
SMB356733-4	80063	21	35
SMB356754	80063	21	19
SMB356755	80063	21	21
SMB356778	80063	9	37
SMC143429-1	80063	12	3
SMC143429-1	80063	19	9
SMC143770	80063	4	4
SMC143770	80063	20	37
SMC144538	80063	18	39
SMC144539	80063	18	32
SMC144544	80063	18	20
SMC144545	80063	18	44
SMC144546	80063	18	45
SMC144547	80063	18	50
SMC144556	80063	17	13
SMC144565	80063	19	7
SMC144571	80063	19	13
SMC144572	80063	19	16
SMC144589	80063	19	18
SMC144594	80063	2	7
SMC144600	80063	22	14
SMC144607	80063	23	27
SMC144637	80063	4	10
SMC144642	80063	4	25
SMC144661	80063	5	12
SMC144706	80063	6	12
SMC144712	80063	6	28
SMC144716	80063	2	1
SMC144729	80063	13	21
SMC144731	80063	16	1
SMC144754	80063	12	16
SMC144774	80063	6	30
SMC144793	80063	6	7
SMC144805	80063	6	36
SMC144809	80063	6	5
SMC144817	80063	6	23
SMC144820	80063	6	41
SMC144877	80063	11	7
SMC144887	80063	7	7

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMC144889	80063	7	32
SMC144891-1	80063	7	31
SMC144891-2	80063	7	30
SMC144898	80063	7	9
SMC145036	80063	12	15
SMC178506	80063	22	4
SMC178695	80063	6	31
SMC283166-2	80063	16	2
SMC2832005-1	80063	18	18
SMC356720	80063	19	8
SMC357217	80063	21	15
SMC357233	80063	21	25
SMC357233-3	80063	21	13
SMC357233-4	80063	21	12
SMC357256	80063	21	17
SMC357257	80063	21	18
SMD144511	80063	2	6
SMD144532	80063	2	3
SMD144532-11	80063	17	6
SMD144532-12	80063	18	28
SMD144532-13	80063	18	41
SMD144532-14	80063	18	33
SMD144532-15	80063	18	27
SMD144532-4	80063	18	38
SMD144532-5	80063	18	55
SMD144532-6	80063	18	34
SMD144532-7	80063	18	53
SMD144532-8	80063	17	7
SMD144532-9	80063	18	40
SMD144534	80063	17	2
SMD144535	80063	17	4
SMD144561	80063	2	4
SMD144561-17	80063	20	44
SMD144561-20	80063	20	69
SMD144561-21	80063	20	63
SMD144561-22	80063	20	52
SMD144562	80063	19	3
SMD144592-20	80063	23	11
SMD144595	80063	22	2
SMD144610-10	80063	4	11
SMD144610-11	80063	4	15
SMD144610-12	80063	3	25
SMD144610-13	80063	4	35
SMD144610-14	80063	3	18
SMD144610-16	80063	3	24
SMD144610-17	80063	4	37
SMD144610-18	80063	3	7
SMD144610-19	80063	3	26
SMD144610-2	80063	3	9
SMD144610-20	80063	4	16
SMD144610-22	80063	4	21
SMD144610-23	80063	4	8
SMD144610-6	80063	3	8
SMD144610-7	80063	4	32
SMD144627	80063	3	22
SMD144657	80063	3	4
SMD144659	80063	5	1
SMD144659-4	80063	5	6
SMD144659-6	80063	5	13
SMD144659-7	80063	5	5
SMD144678	80063	2	2
SMD144678-10	80063	6	8
SMD144678-11	80063	9	17
SMD144678-12	80063	10	6
SMD144678-13	80063	9	32
SMD144678-14	80063	6	35
SMD144678-15	80063	10	10
SMD144678-16	80063	10	8
SMD144678-4	80063	9	15
SMD144678-5	80063	9	35
SMD144678-8	80063	9	6
SMD144678-9	80063	9	12
SMD144679	80063	6	18
SMD144680	80063	6	19
SMD144681-1	80063	6	25
SMD144681-2	80063	6	4
SMD144683-1	80063	6	2
SMD144683-2	80063	6	3
SMD144686-1	80063	6	44
SMD144686-2	80063	6	1
SMD144687	80063	6	6
SMD144688	80063	6	20
SMD144689	80063	6	21
SMD144690	80063	6	38
SMD144691	80063	6	32
SMD144692	80063	6	42
SMD144724	80063	15	12
SMD144770	80063	12	1
SMD144771	80063	12	6
SMD144798	80063	6	33
SMD144826	80063	11	5
SMD144841	80063	11	4
SMD144882-10	80063	7	4
SMD144882-11	80063	7	3
SMD144882-13	80063	7	12
SMD144882-14	80063	7	2
SMD144882-18	80063	7	16
SMD144882-2	80063	7	22
SMD144882-20	80063	7	20
SMD144882-21	80063	9	8
SMD144882-22	80063	7	33
SMD144882-3	80063	7	14
SMD144882-4	80063	9	27
SMD144882-5	80063	9	26
SMD144882-6	80063	9	9
SMD144882-7	80063	7	17
SMD144882-8	80063	9	2
SMD144882-9	80063	7	19
SMD144916	80063	11	3
SMD144992	80063	6	27
SMD145003	80063	6	26
SMD145011	80063	6	29
SMD145882	80063	9	36
SMD249235	80063	24	11
SMD357513	80063	21	4
SMD357513-1	80063	21	6
SMD357515	80063	1	1
SMD357515-1	80063	25	4
SMD357515-2	80063	25	3
SMD357518	80063	25	2
SMD357519	80063	25	1
TG0-1C	71034	22	3
TS101P01	81350	20	20
TS101P01	81350	23	1
TS102P01	81350	8	12
TS1G2P01	81350	12	12
TS102P01	81350	18	4
TS102P01	81350	20	3
TS102P01	81350	23	4
TS102P01	81350	24	6
TS103P01	81350	20	22
TS103P01	81350	23	7
UG290AU	80058	17	8
UG290AU	80058	19	10
U79U	80058	4	9
VG-11	96906	5	2
10107-3	82142	8	13
101C7-3	82142	12	10
10107-3	82142	24	5
102-3S6	80063	9	31
102-3S6	80063	19	26
103A1	92825	20	61
103A2	92825	18	21
103A2	92825	20	41
104-1S-8L	96906	7	34
104-1S-8L	96906	20	45
104-33-3A	80063	20	62
105-602-5	74970	19	14
105-603-5	74970	19	6
12AU7	81349	19	1
12AU7	81349	22	8
1220-02	78189	20	70
126-806	02660	19	12
160-110-4	74970	23	23
1702-00	78189	9	33
1702-C0	78189	20	59

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
1720-00	78189	7	5
196P10301S4	56289	8	6
196P10301S4	56289	18	3
196P10301S4	56289	20	8
196P10301S4	56289	23	3
196P10302S1	56289	12	8
196P47301S4	56289	20	28
2N336	80131	21	16
2N498A	80131	21	24
259-0590-00	13499	4	39
26-191	02660	12	5
26-191	02660	24	8
26A6	81349	17	3
26A6	81349	19	5
26A6	81349	22	6
26A7GT	81349	19	8
26C6	81349	6	43
26D6	81349	24	9
26FZ6	49671	6	40
29F496	08806	20	17
300-1	80063	12	17
31-119	02660	4	20
31-119	02660	24	10
313	08806	11	2
342006	75915	4	18
4-40NC2B1-4	77250	20	57
5133-15	79136	19	25
6-32NC2B3-32	83385	20	66
6AJ5	81349	12	2
6AJ5	81349	19	11
605	72136	20	25
605	72136	23	20
7S35335-16	96906	15	2
8-32NC2B3-32	77250	20	46
82-830	02660	7	8
82-830	02660	8	14
82-830	02660	12	4
86P4740155	56289	7	10
88-1666M0D	78488	6	45
88-2086M0D	78488	6	24
96P4730152	56289	4	13
96P4730152	56289	5	15

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.
5955-00-058-3937	13	14
5905-00-081-6137	21	32
5955-00-089-3073	13	6
5905-00-106-1282	20	9
5905-00-106-1282	23	21
5905-00-110-0196	8	5
5905-00-110-0196	12	9
5905-00-110-0196	18	2
5905-00-110-0196	20	29
5905-00-110-0196	8	5
5905-00-110-0196	12	9
5905-00-110-0196	18	2
5905-00-110-0196	20	29
5905-00-111-8357	18	8
5905-00-114-5393	5	8
5905-00-114-5393	20	6
5905-00-114-5489	24	7
5905-00-156-0435	20	33
6240-00-179-1811	5	2
5905-00-247-8682	20	15
5905-00-247-8732	20	34
5935-00-258-8570	4	12
5905-00-279-1754	8	19
5905-00-279-1754	20	32
5820-00-396-3195	1	12
5910-00-495-0042	21	38
5920-00-553-4420	4	18
5910-00-681-6994	12	25
5950-00-683-7344	12	10
5950-00-698-0222	6	45
5955-00-709-5430	13	10
5955-00-728-5535	13	11
5960-00-860-7709	6	39
5960-00-860-7709	17	1
5960-00-860-7709	19	4
5960-00-860-7709	22	7
5960-00-860-7709	24	12
5960-00-860-7710	19	2
5960-00-860-7710	22	9
5955-00-892-3760	13	5
5910-00-901-8949	20	21
5910-00-926-9776	12	27
5910-00-984-8373	20	11
5910-00-984-8373	23	17

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CM15ED300G03	81349	20	21
CM15FD101GP3	81349	20	11
CM15FD101GP3	81349	23	17
CR18AU10-000000MHZ	81349	13	5
CR18AU12-000000MHZ	81349	13	14
CR18AU14-000000MHZ	81349	13	6
CR18AU6200-000KC	81349	13	4
CSR136105KS	81349	21	38
M24251-6-2	81349	6	39
M24251-6-2	81349	17	1
M24251-6-2	81349	19	4
M24251-6-2	81349	22	7
M24251-6-2	81349	24	12
M24251-6-5	81349	19	2
M24251-6-5	81349	22	9
RCR20G102JS	81349	8	5
RCR20G102JS	81349	12	9
RCR20G102JS	81349	18	2
RCR20G102JS	81349	20	29
RCR20G223JS	81349	20	9
RCR20G223JS	81349	23	21
RCR20G224JS	81349	5	8
RCR20G224JS	81349	20	6
RCR20G681JS	81349	18	8
RCR20G823JS	81349	24	7
RCR20G825JS	81349	20	15
RCR32G471JS	81349	20	34
RCR42G390JS	81349	20	33

NOTE: SEE PAGE 72 FOR ADDITIONAL LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS

ADDITIONAL LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.
5910-00-044-4067	12	24
5910-00-060-9619	8	8
5910-00-060-9619	23	15
5905-00-104-8335	20	26
5905-00-104-8345	20	31
5905-00-114-5398	18	5
5905-00-114-5398	20	7
5905-00-224-6388	2	14
5910-00-543-0506	8	16
5905-00-809-3275	4	22
5905-00-809-3275	8	2
5910-00-818-9758	18	19
5910-00-821-4702	18	17
5910-00-821-4702	23	2
5910-00-821-4702	24	4
5910-00-832-5722	12	22
5910-00-833-4408	20	14
5910-00-844-6710	8	15
5910-00-850-0540	23	6
5910-00-855-2389	8	3
5910-00-892-9904	12	20
5910-00-899-4395	18	12
5910-00-899-4395	20	4
5910-00-984-8373	12	19
5905-00-993-2380	20	40

ADDITIONAL LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CC22CK1R5C	81349	8	16
CM15CD120-J03	81349	20	40
CM15ED390G03	81349	12	20
CM15FD101GP3	81349	12	19
CM15FD511G03	81349	8	8
CM15FD511G03	81349	23	15
CM15FD750G03	81349	12	22
CP05A1KB224K3	81349	18	19
CP05A1KE103K3	81349	18	17
CP05A1KE103K3	81349	23	2
CP05A1KE103K3	81349	24	4
CP09A1KB104K3	81349	18	12
CP09A1KB104K3	81349	20	4
CP10A1K3103K3	81349	8	15
CP12A1KF103K3	81349	20	14
MILR55182-5	81349	2	14
RCR20G225JS	81349	18	5
RCR20G225JS	81349	20	7
RW30V820	81349	4	22
RW30V820	81349	8	2

By Order of the Secretary of the Army:

Official:

PAUL T. SMITH
Major General, United States Army
The Adjutant General

BERNARD W. ROGERS
General, United States Army
Chief of Staff

DISTRIBUTION:

To be distributed in accordance with DA Form 12-51, Direct/General Support TMP literature requirements for R-392/URR.

☆ U.S. GOVERNMENT PRINTING OFFICE : 1990 0 - 262-912 (30515)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)
Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER	DATE	TITLE
TM 11-5840-340-12	23 Jan 74	Radar Set AN/[illegible]-76

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.	IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
2-25	2-28			Recommend that the installation antenna alignment procedure be changed throughout to specify a 2° IFF antenna lag rather than 1°. REASON: Experience has shown that with only a 1° lag, the antenna servo system is too sensitive to wind gusting in excess of [illegible] knots, and has a tendency to rapidly accelerate and decelerate as it hunts, causing strain to the drive train. Hunting is minimized by adjusting the lag to 2° without degradation of operation.
3-10	3-3		3-1	Item 5, Function column. Change "2 db" to "3db." REASON: The adjustment procedure for the TRANS POWER FAULT indicator calls for a 3 db (500 watts) adjustment to light the TRANS POWER FAULT indicator.
5-6	5-8			Add new step f.1 to read, "Replace cover plate removed in step e.1, above." REASON: To replace the cover plate.
		FO3		Zone C 3. On J1-2, change "+24 VDC to "+5 VDC." REASON: This is the output line of the 5 VDC power supply. + 24 VDC is the input voltage.

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
SSG I. M. DeSpiritof 999-1776

SIGN HERE: SSG I. M. DeSpiritof

DA FORM 1 AUG 74 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

HISA 1686-75

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE

BE EXACT. . .PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER	SIGN HERE:

DA FORM 1 AUG 74 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2 (TEST)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER	SIGN HERE:

TEAR ALONG DOTTED LINE

DA FORM 1 AUG 74 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2 (TEST)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE

BE EXACT. . .PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER	SIGN HERE:

TEAR ALONG DOTTED LINE

DA FORM 1 AUG 74 2028-2 *(TEST)*

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2 (TEST)